

Class. 050

Book.

Accession

15760

# SCIENTIFIC AMERICAN

A WEEKLY JOURNAL OF PRACTICAL INFORMATION, ART, SCIENCE, MECHANICS, CHEMISTRY, AND MANUFACTURES.

Vol. XXX, No. 1.

NEW YORK, JULY 5, 1879.

FEB 20 1919

[POSTAGE PREPAID]

ANN ARBOR, MICH.

## THE KANSAS WHIRLWINDS.

On the evening of May 30, a severe storm swept over portions of Kansas, Nebraska, and Missouri, developing locally two or more whirlwinds of limited scope,—but of terrific violence. The severest of these appears to have formed on the Salina river, Kansas, crossing the country to Solomon river, thence northeastward into Nebraska. Much of the country traversed has been but recently settled, and in the absence of complete telegraphic communication, it is impossible to form a connected idea of the course of either of the whirls, or to gain any definite idea of the destruction wrought by them. Forty or fifty persons are reported killed and wounded; and many houses were wrecked at points so situated as to make it certain that no single whirlwind could have done all the mischief. Even where a definite line of disaster can be traced on the map, it takes a curiously zig-zag direction; and local reports describe the main course as

having been diversified by many remarkable loops and curves.

In their general features, the whirls substantially repeat those of the whirlwind that wrecked the town of Richmond, Mo., just a year before. There was the same sort of funnel-shaped cloud, with its terrific rotary motion and irresistible suction, sweeping across the country with a writhing motion, leaving in its track a looped and sinuous line of ruin and death. Whatever came within its range was lifted bodily, torn to pieces, and scattered broadcast over the country. Nothing was blown down; everything was twisted and whirled into promiscuous ruin. Horses, cattle, and hogs were caught up and carried to considerable distances, then thrown aside, crushed often into shapeless masses. In some places the track would be straight and narrow; at others the terrible meteor would sway from side to side, leaving a belt of partial destruction half a mile wide, with

here and there a section entirely unscathed. In one island-like space in a loop of complete devastation. In one of these loops, it is said, a complete devastation. In one of these loops, it is said, a complete devastation. In one of these loops, it is said, a complete devastation.

Our engraving shows, as well as a single drawing can, the general aspect of whirlwinds of this nature. The artist, Mr. Davidson, has had the good fortune to witness one or more of these unwelcome visitants, without experiencing its immediate effect, and has given an accurate picture of their appearance. It is impossible for the most lively imagination, uninstructed by actual observation or experience, to form any adequate idea of the imposing grandeur or the terrific force of whirling storms. The forward motion of the whirl may be not more rapid than that of a stiff breeze; yet the actual speed of the wind in the whirl would seem to be immeasurably great. It is impossible to estimate the resistless violence of the air movement at such times. Houses



THE KANSAS WHIRLWINDS.



After submitting the evidence in favor of this view, Mr. Jenkins argues in this wise: If the north end of the dipping needle is a south pole, its pointing to the ground in Boothia (where Sir James Ross located the earth's north magnetic pole) must be attributed to attraction. If it is attracted it is attracted by something either in the crust of the earth or at the center of the globe. If there is something in the earth's crust which attracts the needle in Boothia, it ought to attract the needle in London. But the needle in London is attracted neither to the crust at Boothia nor to the earth's center. The truth is, Mr. Jenkins believes, that the north pole of the needle pointed to the ground almost perpendicularly in Boothia because it was repelled by the true north



magnetic pole in the atmosphere above that region when Sir James Ross was there fifty years ago.

Further evidence as to the existence of the alleged magnetic belts above the earth's surface is promised. Meantime it is of the first importance, Mr. Jenkins thinks, that it should be clearly settled whether the magnetic pole remains in or above Boothia. According to his calculation it should now be in lat. 72°, long. 115°, in Prince Albert Land.

#### OBJECTIONS TO SELF-PROPELLING FIRE ENGINES.

Owing to the practical difficulties in the working of self-propelling fire engines and doubts as to their relative efficiency, the New York Fire Department lately called for reports from the battalion chiefs with regard to the engines in use here. An opinion was also asked from the chief of the department, Mr. Eli Bates, who states the main objections to them as follows:

"Ninety pounds of steam pressure is required to be kept on the boiler continually for the purpose of conveying them to a fire, the result of which is that the continual pressure weakens the boiler, and more repairs are required than to the boilers of horse engines. The engines and pumps are used in going to and returning from fires, thereby causing considerable wear and tear on the machinery. They cannot be conveyed to and from a fire (especially when there are snow and ice in the streets) as safely as a horse engine. The wear and tear on the running gear exceeds that of a horse engine on account of the additional weight and the sudden strain when the motion is reversed, and when there is deep snow on the ground it is not a certainty that they can reach a fire without horses. With horses attached to them and assisted by steam power in heavy wheeling they are the best. They cannot be used by the department generally (the same as horse engines), but only in companies where the officers and men have been specially trained to the handling of them, and this cannot be acquired without long experience, during which time they are liable to meet with serious accidents. I would further state that I consider them more liable to cause fires from cinders than the horse engines while going to and returning from fires, especially in localities where light and inflammable goods are hanging in front of stores or on awnings."

It would appear from the above that further invention is needed before the steam fire engine can be called a perfected machine.

#### THE PROSPECTS OF TEA CULTURE.

That it is possible to grow good tea in this country is beyond doubt. That by the cultivation of a few bushes in garden plots a great many American families may be able to secure a small quantity of finer tea than can be had in the market, without calling in outside help and without seriously increasing domestic care and labor, is quite probable. That it will ever pay for Americans to undertake tea growing as a business is altogether another matter. No doubt mechanical improvements in the processes of tea gathering and curing may greatly diminish the cost of labor; but the same improvements can be introduced elsewhere, and ultimately the American tea industry would have to compete on unequal terms with that of China, India, Japan, and other lands.

The question of future competition among existing tea growing countries is seriously considered by the *Indian Tea Gazette*, of Calcutta, in discussing the prospects of Indian tea. After reviewing hopefully the immediate prospects of tea culture in India, the *Gazette* insists that great caution is required in the extension of the tea industry.

"Doubtless the tea drinkers in the world are increasing greatly year by year, but, alas! so is the produce. It is not now a case of India *versus* China; it is India *versus* China, Java, Japan, Ceylon, etc. It is certainly quite on the cards that in a few years the supply will exceed the demand. No one can say that it will be so; equally can no one say that it will not be so. But so much we can and do say: that, with things as they are to-day, he is not a wise man who embarks in tea cultivation, or who extends the area he has at present, except all the conditions for success are pre-eminently to the fore. We think where these all exist tea will pay for ever and a day; but their existence, all combined, is quite exceptional. To give the sum of our advice in a few words: we would not ourselves, as things are, plant tea in any but the best tea climate and on any but perfectly flat land—not unless we could eventually look for more than 6 mds. (600 pounds troy) per acre—where the communication is not good, and where any difficulty does now or may hereafter exist as to labor."

At this rate the prospect of any great development of tea culture in this country is not alarmingly brilliant.

#### THE DISEASES OF BUILDING TIMBER.

In an article on this subject the *Building News* remarks that it seems an odd thing that timber trees should be almost as liable to disease as man is; but it is undoubtedly true, and the disease, in the case of trees as well as of man, arises from preventable causes. Dr. James Brown states that the principal diseases likely to be brought on forest trees by bad management are: (1) bark binding, (2) lichen growth on the bark, (3) stag-horn tops, (4) scale, (5) premature seeding, (6) dropsy, (7) ulcers, (8) wounds, and (9) stunted growth of the young wood. Now, in addition to these defects, we have in the manufactured timber such matters to contend with as doatiness and the excess of sap and weariness, concerning which so many complaints are made.

The disease called "bark bound" is caused by the bark

being girdled or bound about the wood of the tree, thereby preventing the proper flow of the sap, and also arresting the descent of woody matter between the wood and bark. If the cause of this disease be not remedied in time, the vital fluids become gradually checked, till at length the passages become entirely closed, and, as a natural consequence, the tree dies.

The appearance of lichens on the bark of trees is not always a symptom of disease, but may be occasioned by a temporary derangement of the outer bark, and if observed in time, diseases may be arrested by removing the cause before it has had time to become decidedly fixed in the constitution of the trees affected.

Willows and poplars, which luxuriate in a soil rather damp than otherwise, generally become staghorn-topped when grown in a soil too dry for their healthy development. Elm, oak, ash, plane, etc., generally become in the same condition when the soil in which they are grown is too damp to maintain them in a healthy state.

"Scale" is a small white insect found clinging to the bark of some species. In forest trees it is usually found upon the ash while in a young state. These insects appear like very numerous small white spots, like those on the bark of the birch.

As to premature seed-bearing, it may be said that trees in a healthy, rapid growing state are seldom found to produce seed till they have arrived at a considerable age and size. Generally speaking, any forest tree under forty years of age bearing much seed is not likely to arrive at a valuable size. When a young tree produces a profusion of seed there can be no doubt that it is in a state of premature decay, and we may be assured that it will not become valuable as timber.

Dropsy generally takes place in forest trees either where the soil is too rich for them, or where there is an excess of moisture about the roots. The cause appears to be that the roots absorb into the system of the tree an excess of juice, which the leaves and bark cannot assimilate. In this disease unnatural swellings are observed on some part of the stem, and which begin to rot and throw off the bark. It is incurable, and the only thing to do is to prevent it by proper draining of the ground and seeing that it be not over rich.

An ulcer much resembles dropsy, but it is mostly confined to the larch and others of the coniferous tribe. Its appearance is that of a running sore upon the side of the stem, where the natural juices escape in the form of a hard resinous matter. This disease is mostly found upon young trees of this order, and is frequently occasioned by insects lodging their eggs in the inner bark, where the young live for a time and destroy the albumen.

Wounds are often caused by the trees receiving damage on their stems by having the bark peeled off by accident in some way or other, and may not only prove injurious to their health, but also be a frequent cause of death. But any simple wound made upon a healthy tree is seldom or never found injurious, but soon heals up.

The stunted growth of young wood is at once apparent by the very short annual growth of young wood upon all the lateral branches, and may be in general the natural result of any of the diseases already described. Every tree, when it has attained its full size and development of its nature, however healthy it may have hitherto been, gradually begins to fall in making young wood. This is the work of time, doing to the old tree what the disease does to the young.

#### "SCIENTIFIC CREDULITY."

A striking illustration of the anti-scientific bias which prevails in certain spheres of culture is afforded in an article in the *London Spectator*, wherein that clever journal moralizes at great length over what it calls scientific credulity. The occasion is an ingenious hoax perpetrated last winter by an Australian newspaper and widely circulated since. The *Spectator* says:

"The story having appeared in the *Times* without comment has, of course, been republished everywhere, and it is amusing to see that in many instances those who republish it think it necessary to be cautious and repudiate total disbelief. So many wonderful things, they say, and in especial one *London Journal* says, have turned out true that it would be rash to declare this one certainly invented. There is a disposition perceptible to think there may be something in it, though not all that is alleged, and that as Mr. Edison has bottled sound, so Signor Rotura—an Italian name was probably chosen because an Italian has made the most recent and successful experiments in embalming—may have bottled life; that as sound may be re-echoed weeks after it was first heard, so a lamb may skip about after it has been some weeks frozen. As there is an electric telegraph why should not death be baffled? That is a very curious instance of a new form of credulity which is growing up among us, a credulity which is not faith, but rather disbelief, so far-reaching that it causes a certain powerlessness of mind, an inability to reject at once and decidedly anything that even puts on the appearance of 'science.' The incapacity to weigh evidence—to see, for example, that for this story there is absolutely as yet no evidence at all, any more than there is evidence for the authenticity of Bulwer Lytton's 'Strange Story,' that there is no witness produced, or promised, or named, nothing but an unauthenticated narrative—is a phenomenon we are all well acquainted with; but this sort of credulity differs in kind from that. It would almost seem as if the advance of science had in some minds decreased the capacity for using the scientific method, as if their confidence in the usual data for reasoning had been

gradually so upset that they did not trust them any longer, and did not see why, a far off locality being granted, parallel lines should not meet, or the whole be smaller than the part. That would not, they think, be much more surprising than the phonograph. We observed only a little while ago a statement going the rounds of the newspapers that a certain Texan had eaten his own weight in meat at one sitting, no one apparently perceiving that if that were true then a pint bottle could hold a quart, and reasoning of any kind, even the reasoning necessary for arithmetic or mensuration, was entirely useless and unmeaning. The great truth that if two plus two can be five, counting is nonsense, and that the terms of any conceivable sum in arithmetic would all shift, seems to have lost some of its hold, to the indefinite injury, if the want of gripe became general, of human reasoning power. That is at all events a strange result of the progress of scientific discovery, and it is all the stranger because the new credulity is almost confined to the action of 'science' itself. People are not generally more credulous. They do not believe in each other more than they did, or in unusual events more than they did, and they believe in the supernatural a great deal less than they did. If the Archbishop of Canterbury and Lord Houghton and Professor Tyndall all declared that they saw and spoke with a sentient being possessing a body clearly not human, all journalists would at once accuse them either of falsehood or hoaxing or a very suspicious condition of brain and eyesight; but if they all declared they had seen a man swallow a drug which turned him all over both yellow and blue at the same time, the statement would be printed everywhere as the last 'medical marvel.' Yet the former assertion, though requiring, of course, unusually complete evidence, would involve no greater impossibility than the existence of any supernatural being does—which existence half the incredulous accept—while the latter is a contradiction in terms, and no more capable of proof than the assertion that on one occasion and in the usual conditions of the world, water being still water did outweigh mercury, which was nevertheless still mercury. There is the greatest reluctance even to consider any statement involving an acceptance of the supernatural combined with the most childlike readiness to swallow anything which can be described as a mechanical, medical, or mental marvel."

The *Spectator* goes on, at greater length than we have space for, to illustrate the various phases of this "new form of credulity," which is indirectly charged to the progress of science. Science has done so much that its disciples are half inclined to believe it can do anything, the *Spectator* would have us think. But this credulity as to the power of science is very far from being the state of mind which prevails among the scientifically minded. Over credulousness as to the possibilities of science is the weakness of those who know least of the real character of scientific achievements. In other words, credulity is a condition of ignorance and the lack of rational culture. And the success of scientific hoaxes, so-called, only measures the wide and varied unacquaintance with scientific truths among reputedly intelligent people. To blame science for this is about as absurd as it would be to blame civilization for the unreasonable beliefs with regard to the powers of civilized men current among certain savages. It is the absence of civilization or science in either case that makes the false idea tenable.

The circumstance that many who are very skeptical with regard to alleged supernatural occurrences unsupported by sufficient evidence, are yet over-ready to accept scientific marvels, simply proves that their education is not half completed. They know too little of science, and have had no real training in scientific habits of thought. The *Spectator* says that men are as credulous now as ever; that the popular appetite for the marvelous has not been diminished by the progress of science, though its direction has been changed; so that men now look to scientific instead of supernatural agencies for its gratification.

"The process of god making, so often repeated by humanity, is going on again, and Nature is being endowed with attributes which imply an absence of conditions and enveloped in the very atmosphere of awe which once surrounded the supernatural," which is true only so far as men have not yet been brought directly under the influence of scientific culture. Just so far as men are ready to accept without evidence any assertion made in the name of science we may be sure that they are ignorant of the first great lesson that science has to teach, and that their minds have lacked the training which comes through the acquisition of knowledge by scientific methods. "Scientific credulity" is a contradiction in terms. Credulity is essentially unscientific.

#### A Large Block of Stone.

One of the largest blocks of granite ever cut in the United States has recently been taken from the quarry at Vinalhaven. It is 50 feet long, 5½ feet square at the base, and 3½ feet square at the top. It weighs from 75 to 100 tons. It cost \$1,700 to quarry it and move it to the shed where it is to be finished. It is to foot the shaft of the monument to General Wool, to be erected at Troy, N. Y. The shaft, with the base stones, will form a structure of about 75 feet high.

**PROTECTING LEAD PIPE.**—The *Revue Industrielle* says that the interior of a lead pipe can be covered with an incrustation of sulphide of lead by making a warm concentrated solution of sulphide of potash flow through it for ten or fifteen minutes. Pipes thus treated seem to be covered with grayish varnish, which prevents the water flowing through them from acting upon the lead.



## RECENT AMERICAN PATENTS.

An improved device for exhibiting diamonds and other precious stones to purchasers, to enable them to judge of their effect when worn, has been patented by Mr. Leon P. Jeanne, of New York city. It consists of a clamp of peculiar shape, provided with notched arms and claws, for holding the gem, and an ear wire or hook.

Mr. F. D. Thurman, of Atlanta, Ga., has patented an improved harness for horses. It consists in a rigid yoke open at the bottom and closed or bent over at the top, connected with the shaft, and provided with tugs and a girth or belly band for holding the yoke and shafts down to their places.

A bottle stopper, especially designed for bottles containing beer, mineral waters, and other effervescing liquids, has been patented by Mr. W. H. G. Savage, of Kingston, Ontario, Canada. A cam pivoted to the stopper and to a rigid standard serves to hold the stopper in place and to release it when required.

Messrs. A. A. Moore and Robert Cameron, of Trinidad, Col., have patented an improved fastening for horse collars, to take the place of the usual leather strap and buckle. It consists in a hinged metal strap attached to one part of the collar, and arranged to engage pins on a buckle plate on the other side of the collar.

An improved sleeping car berth has been patented by Mr. Frederick C. Hills, of Sioux City, Iowa. The object of the invention is to furnish a guard for preventing sleepers from rolling out of the upper berths of cars and vessels, and to prevent the berths from shutting up should the car be overturned.

An improved gauge for applying lace to goods for trimming ladies' dresses, and for other purposes, has been patented by Mr. Joseph A. Denais, of Jersey City, N. J. It consists in a combination of U-shaped plates and sponge holders with a base plate.

An automatic device for filling drinking troughs for cattle from ponds and shallow wells, has been patented by Mr. W. L. Lankford, of Mirabile, Mo. It consists of a pipe leading from the pond to the trough, having a valve at the upper end, and a stem running through the pipe and pivoted to a float in the trough. The flow of water is controlled by the float.

Mr. George J. Record, of Conneaut, Ohio, has patented an improved casing or jacket for butter packages and other vessels, which may be removed and put on when required, the object being to keep the package neat and clean, and to protect it from injury.

An improved apparatus for evaporating and calcining alkaline solutions has been patented by Mr. H. L. Orrman, of Berlin Falls, N. H. It is designed for recovering the caustic soda contained in the alkaline solution or waste liquor from the chemical treatment of wood in the manufacture of wood pulp.

Mr. Edwin V. Heaford, of Covington, Ky., has patented an improvement in adjustable pattern plates for draughting garments. It contains the outlines of the garment and the details of the seams and various parts. To produce a perfect fitting draught, it is only necessary to adjust the pattern to the person and then lay it on a piece of paper and mark it out.

An improved honey knife, for uncapping comb cells, has been patented by Mr. Oliver J. Hetherington, of East Saginaw, and Tracy F. Bingham, of Abromia, Mich. It consists of a honey knife having a flange or cap arrester upon its rear edge.

Mr. Samuel Hower, of Cressona, Pa., has patented a box or cabinet for post office use, for facilitating the work of stamping letters and canceling stamps in small post offices. It consists of a small box or cabinet of suitable dimensions, to lie upon a post office table, divided into a number of compartments, and containing canceling stamps, tickets, etc.

An improvement in heels for boots and shoes has been patented by Mr. Benjamin Bradshaw, of New York city. It consists of a plate provided with a male screw attached to the sole of a boot or shoe, and a plate having a female screw attached to the heel. A heel attached by this device may be easily removed and replaced.

An improvement in mash tubs, for holding and mixing the mash, has been patented by Mr. Gottlieb Young, of Columbia, Pa. It consists in the peculiar construction and arrangement of stirring devices, and a false bottom, which facilitates drawing off the liquor.

Mr. Wm. L. Pitts, of Cerro Gordo, Ill., has patented an improved device for holding swine, which consists of tongs having V-shaped jaws, one of the jaws being provided with a round-headed pin, which enters the cavity between the sides of the animal's lower jaw and prevents the tongs from slipping.

An improvement in refrigerators, patented by Mr. Joseph P. Ast, of Staunton, Va., which consists in combining with the outer case of the refrigerator and the ice box, a series of separated parallel strips, which give direction to the circulating currents and strengthen the ice box.


An improvement in artificial pivot teeth has been patented by Mr. J. W. Holt, of Goldsborough, N. C. It consists in providing each tooth with a metal tube set into it when moulded, and burned in when the tooth is baked. The object of the invention is to provide a pivot hole of sufficient depth and size to admit of using a strong pivot.

An improved cam for stamp mills, patented by Mr. James Scott, of Denver, Col., is constructed so that the hub may

be keyed to the shaft independently of the cam arms. This arrangement admits of adjusting the cam arms, and renders it easy to detach either of the cam arms and replace it with a new one, without interfering with the other.

## NEW ELECTRIC LAMP.

M. Jamin surrounds two nearly parallel carbon sticks with an elliptical coil of wire, through which passes the current which gives the light. This lamp is shown in the annexed engraving, which we take from *La Nature*; the coil, being in the same vertical plane as the carbon rods, is arranged so that the current through it is in the same direction as that which flows through the latter, producing the arc at their extremities. In virtue, therefore, of the law that currents in the same direction attract and those in opposite directions repel each other, the currents through the upper portion of the coil will attract the arc, and those through the lower portion will repel it. The lateral currents also, by reason of their tendency to deflect the arc into parallelism, aid in repelling the latter to the extremities of the carbons. So powerful is this effect of repulsion that, if the number of turns of wire in the coil be too great, the arc, if caused to pass between the lower portions of the carbon rods, will move upward with great velocity, and the light becomes extinguished, owing to the arc being too strongly attracted in the direction of the extremities of the carbons. With this apparatus the arc becomes strongly curved; and it is stated that the light evolved is very considerably augmented by its use, owing to the carbons being no longer consumed lateral-

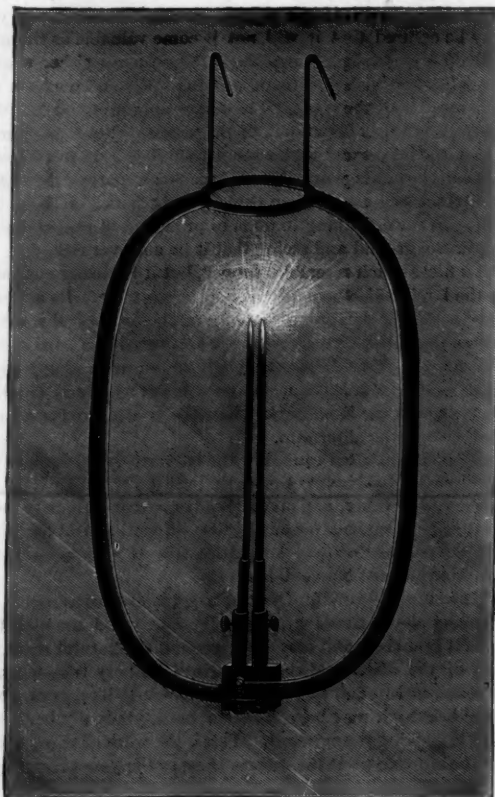

M. JAMIN'S ELECTRIC LAMP.

ly, so as to shade the light. By using this apparatus, also, the lamp may be inverted, without any danger of the arc quitting the extreme ends of the carbon rods. These appear to be important advantages gained in the solution of one of the main questions in connection with electric lighting.

## LUEDTGE'S UNIVERSAL TELEPHONE.

Dr. Luedtge, of Berlin, whose microphone, or, as he calls it, universal telephone, was patented January 12, 1878, some time before the microphone notes of Hughes and Edison were published, has lately improved his instrument to such a degree that it will probably answer all reasonable demands for telephonic conversation. The disagreeable sounds that are heard in other microphones have been avoided, and

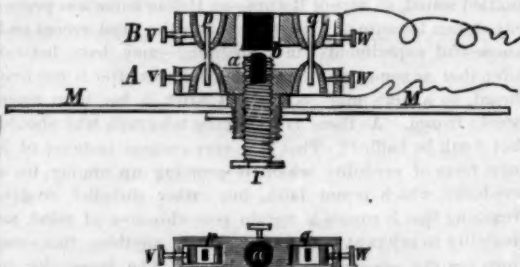


Fig. 1 and 2.—LUEDTGE'S TELEPHONE.

words spoken into the transmitter are reproduced so clearly and so loud that it can be heard best a short distance from the receiver, which is an ordinary Bell telephone. With it a healthy ear might be injured. If, however, persons that do not hear well place the receiver near the ear they are able to hear much better than with other similar instruments.

Words have been plainly transmitted by this apparatus

through a distance of 186 miles. A special signal is not necessary. If a Bell telephone and a Luedtge microphone are brought in connection, a clear, deep, and impressive tone, somewhat like the tone of a fog horn, which can be heard for quite a distance, is perceived at the transmitting as well as at the receiving station.

The essential part of the instrument is the connection between the two electric conducting bodies, *a* and *b*, Fig. 1 (pre-

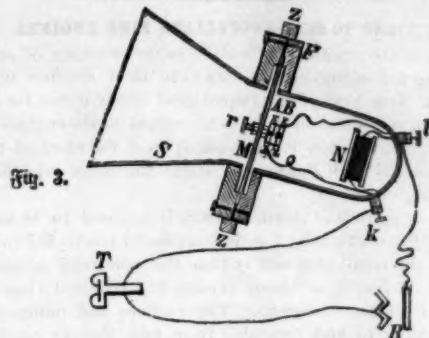


Fig. 3.—LUEDTGE'S TELEPHONE.

ferably of iron, platina, or carbon). One of the pieces, *b*, is level at the contact surface, but the other, *a*, is rounded. The electric current passes through this contact, and the variations in the electrical resistance at this point, while speaking, cause the vibrations of the membrane in the receiving telephone.

A peculiarity of Luedtge's construction is that both of the contact pieces are united to a support fastened to the middle of the membrane, *M*, so that both vibrate with the membrane. The contact piece, *a*, rests in a rectangular brass frame, *A*. The contact piece, *b*, is supported in a similar manner by the frame, *B*. The two frames, *A* and *B*, are connected to each other by means of the strips of caoutchouc, *p* and *q*. Caoutchouc is a poor conductor of tone vibrations. The tone vibrations transmitted to the membrane, *M*, are received by the contact piece, *a*, unimpaired and with their entire power, but to affect the contact piece, *b*, they must pass the rubber strips, *p* and *q*. By this contrivance their intensity is materially decreased or modified, and there is a difference in the vibrations of *a* and *b*.

The small screws, *v* and *w*, serve to regulate the compression of the caoutchouc strips, *p* and *q*.

Fig. 2 is a transverse section of the complete apparatus. *S* is the tone receiver, *M* a wooden diaphragm, *F* the casing of the same, *Z Z* pivots for hanging the apparatus in bearings. *A* and *B* are the contact frames; *R* is a screw for partially regulating the contact by moving one of the contact pieces; *k* and *l* screws for fastening the wires; *B* is the battery; *T* the receiving telephone; and *N* a resistance coil.

To adjust the apparatus very carefully it is turned on its horizontal axis. The susceptibility of the apparatus is so great that the small change on the pressure that *B* produces on *A* in turning the apparatus is sufficient to regulate the contact.—*Deutsche Industrie Zeitung*.

## A Gopher Trap Wanted.

The California ground squirrel, commonly known as the gopher, is a most industrious and audacious forager, and though he seems very innocent, is a veritable pest. He consumes an inordinate quantity of grain, and does a vast amount of mischief to gardens and orchards. He and high farming are declared to be absolutely incompatible, and the Golden State is greatly concerned as to the best manner of exterminating him. Poison has been tried, and has proved effective on many squirrels; but they are so cunning that they refuse to swallow it after one season, unless it be offered in a new form. Strychnine, arsenic, and phosphorus have been tried, and now other mortal agents must be adopted to get rid of the aggressive rodents. It is estimated that their damage to the wheat crop alone was last season nearly \$1,000,000, and to gardens and orchards fully \$500,000 more.

Here would seem to be a good chance for some clever inventor to make a good thing for himself and a better for the State. A wide-awake California boy, after proper study of "gopher" habits, ought to be able to outwit the little pests. A successful gopher trap would be worth a small gold mine.

## Destruction of Passaic Fish.

For some weeks a fatal disease has prevailed among the fish of the Passaic river (N. J.) and its tributaries. The trouble was at once charged to poisonous dyes discharged into the stream from silk-factories. The fish warden of Passaic county is of a different opinion, attributing the fatality to certain poisonous vegetable matter which had grown with unusual luxuriance during the late heated spell. This happened at an unusual season, just after the fish had been spawning, and when they had not strength to withstand the injurious effect of the water. The disease is described as a fungous growth on the surface of the fish, beginning at the tail and causing the scales to decay and become loose. In eight or ten days the trouble reached the head, and the fish died. Suckers were first attacked, then catfish, roach, chub, sunfish, perch, and pickerel. Persons eating the fish were attacked with cramps and purging. Fish Warden Roe does not think the sewage has anything to do with the disease. The epidemic is about over in the Passaic River, but is extending to the tributary streams and lakes.



## HYDRIODIC ACID.

Dr. W. Gill Wylie, of this city, calls attention in the *Medical Record* to the value of hydriodic acid as a therapeutic agent in certain cases where the use of potassium iodide is indicated, but where the continued use of the latter would irritate the stomach and seriously interfere with digestion. Hydriodic acid, which is not even mentioned in the text books on therapeutics, is prepared by mixing say 60 grains of potassium iodide with 90 grains of tartaric acid, dissolving in water, and adding sufficient heavy sirup to make four fluid ounces. The object of the sirup is to prevent a decomposition whereby the iodine would be set free. The case that first suggested this remedy was one of asthma of long standing. On trial it was found that one teaspoonful of the above mixture had as much influence on the bronchial surfaces as twenty grains of potassium iodide, and produced no bad effect whatever on the stomach. The author states that for the past six years he has had uniformly good results in the use of hydriodic acid in bronchitis, and in chronic or subacute catarrhal diseases. He has found that it acts as an irritant and does more harm than good, however, in acute febrile stages. He has also used it in chronic malarial poisoning, and in Grave's disease, and recommends its use in place of iodine in goiter and adipose tumors. In a case of the latter he found that it relieved the dull pain about the tumor and slightly reduced the bodily weight of the patient, who was very fleshy. In the use of the new remedy Dr. Wylie says that he has seldom found it necessary to increase the usual dose to obtain the desired effect.

## PNEUMATIC CLOCK.

The pneumatic clocks that were exhibited in the Austrian and American sections of the Paris Universal Exhibition of 1878, were described by us not long since. We give herewith an engraving, which we take from *La Nature*, of a form of pneumatic clock that has been in use for some time in France. It is a large town clock, something like the one which has been in use at Notre Dame since 1867.

The transmission of time by the compressed air and vacuum is effected by means of a piston that moves freely in a pump barrel. The piston is of considerable length and is air-packed, so that little or no air escapes around it.

Every minute, or every half minute, the clock elevates the piston, creating an air pressure in the pneumatic tube, which operates the hands of a distant clock. The piston is allowed to descend after each upward stroke, producing a vacuum, which returns the parts to their original position preparatory to another forward movement of the hands as the piston again descends.

## Active Volcanoes in Java.

The latest accounts from Singapore state that the volcanoes in both the eastern and western districts of Java are in full activity. A broad river of fiery lava was flowing from the crater of Smeru down to the southern coast, illuminating all the neighborhood at night with its ruddy light. The Gedeh mountain was ejecting an enormous amount of cinders, which were completely covering all the surrounding district.

## A Toy City.

A notable example of patient, long-continued, ingenious, but utterly useless labor, is described by a correspondent of the *Amherst (Mass.) Transcript* as on exhibition in Boston. It is the work of a German-American cabinetmaker, Joseph Bergmann, who has been engaged upon it for seventeen years. It represents a city, built in the Swiss style, with mansard roofs, bay windows, and a series of balconies with verandas, etc. The structure stands on a base, representing a hillside, a ledge of rocks with underground railways, etc. There are sixty-five automatic workmen, at work in the mills and about the village, as natural as life. The motive power of the mills is furnished by two overshot water wheels, the lower one taking the waste water and running at right angles with the upper one. The remainder of the machinery, as well as the automatic workmen, is run by weights. The city, or village, is surrounded by trees and

shrubbery, drives and walks, a playing fountain, a running stream, a miniature lake, and all that goes to make up the picturesque in nature. The basement of the principal building is occupied by a lined oil stamp mill in full operation, with three workmen. On either side is a tunnel through which trains of cars pass. At the rear of the building is a blacksmith's shop; the bellows are blowing, the fire on the forge glows, and two blacksmiths are busily engaged in alternately heating a bar of iron and pounding it on the anvil, the strokes of their hammers being distinctly audible. A third is shoeing a horse, the proprietor is at work, and the wife of the last is just entering, bearing her husband's dinner. The third story is occupied by a grist mill, the smut mill being below, both in full operation. One man is dressing the stone for the hopper, while a second supplies the hopper with grain from a neighboring room; the latter empties his measure from his shoulder, returns it in a natural manner, and passes in and out at the door, closing it after him each time. An elevator ascends on the outside from the basement with a load of grain, dumps it, and descends again to be refilled. Just below the elevator the millwright goes up and down on a ladder. Under an oak tree's kindly shade, near the banks of a murmuring stream, sit two lovers, who, by their motions and gestures, would appear to be carrying on an animated conversation. To the right center of the building is a sawmill. The log is propelled on the carriage, the upright saw passes through it slowly, it is then gigged back, the man at the end sets the log for a new cut, and a fellow workman opens the flume gate, restarting the machinery. A third man is engaged sharpening a hand-spike with an ax. The fifth and top floor of the edifice is supposed to be the residence of the proprietor. The windows are sashed, the doors paneled, and the floor made of

characteristic of all anthracite coal. There are three veins of the coal, one of which is seven feet thick, another two and one half feet, and the third of unknown thickness, while there are indications of a seam lying beneath the seven foot vein—the one now worked—of the same or greater thickness. Outcroppings of the veins are traced for many miles. The analysis of this coal as compared with the average grade of Pennsylvania anthracite is as follows:

	Sonora Coal.	Pennsylvania Coal.
Fixed carbon.....	94 to 96 per ct.	85 per ct. (about).
Ash.....	3 to 4 do.	30 do.
Moisture.....	1 to 2 do.	4 to 5 do.
Sulphur.....	0.0 do.	2 trace.
Bitumen.....	0.0 do.	2 trace.
Specific gravity.....	1.77	1.50

The dip of the discovery is 26° toward the opening, rendering the mine easy of drainage and cheaply worked. The length of the branch from the main line at Noria del Valle (33 miles from Guaymas) necessary to reach the mine is 96 miles. It is estimated that after the construction of the road the coal may be marketed in San Francisco and South American ports at \$8 to \$9 per ton.

## Medical Photography.

At a recent meeting of the Photo Section of the American Institute, in this city, Mr. Mason exhibited to the Section some photographs of subjects taken at his studio in Bellevue Hospital. In his remarks he said:


I do not exhibit these prints as specimens of fine photographic work, but as curiosities of disease and how photography is used to illustrate disease. Some of them show the patient both before and after treatment. Such subjects are not very easy to keep still a long time, because most of them are in pain. Something more than ten years ago I was requested by several members of the surgical staff

to illustrate the diseases treated at the hospital, and, after considering the matter some months, finally accepted the proposition, and was appointed the official photographer for the department. There were at that time only three surgeons on the staff who seemed to have an idea that photography could be made useful, or, rather, that it might prove an important adjunct to their work. These three had their most important cases photographed when they were received, and after an operation or when they were discharged. After two or three years other members of the staff, seeing the importance of the work, slowly came in for their share, until at the present day the men who first took little or no interest in the introduction of photography patronize it the most extensively. I made for some of these surgeons a large number of prints of important cases, of which some are sent to Europe to illustrate the processes used in the treatment of diseases in New York. I make three copies, which I furnish free—one to the visiting surgeon in attendance, another to the house surgeon who has charge of the case, and another print I mount in the books of the hospital. Other prints are made on the

surgeons' private orders at little more than cost price. When you refer to the hospital books provided for the last few years, you can find the most important surgical cases not only fully described but illustrated. Many observers have thus been able to avoid mistakes and errors which have been brought to their notice through the means of photography. Thus we see that the surgeons and histologists, like most other scientific men, are more or less dependent on photography in recording for others what they are doing.

## Unshod Horses.

It has been before stated that an experienced farrier in England was advocating the abolishment of horseshoeing, and now a writer in the *London Times* has been trying the experiment, and thus reports: "When my pony's shoes were worn out I had them removed, and gave him a month's rest at grass, with an occasional drive of a mile or two on the high-road while his hoofs were hardening. The result at first seemed doubtful. The hoof was a thin shell, and kept chipping away until it had worked down beyond the holes of the nails by which the shoes had been fastened. After this the hoof grew thick and hard, quite unlike what it had been be-

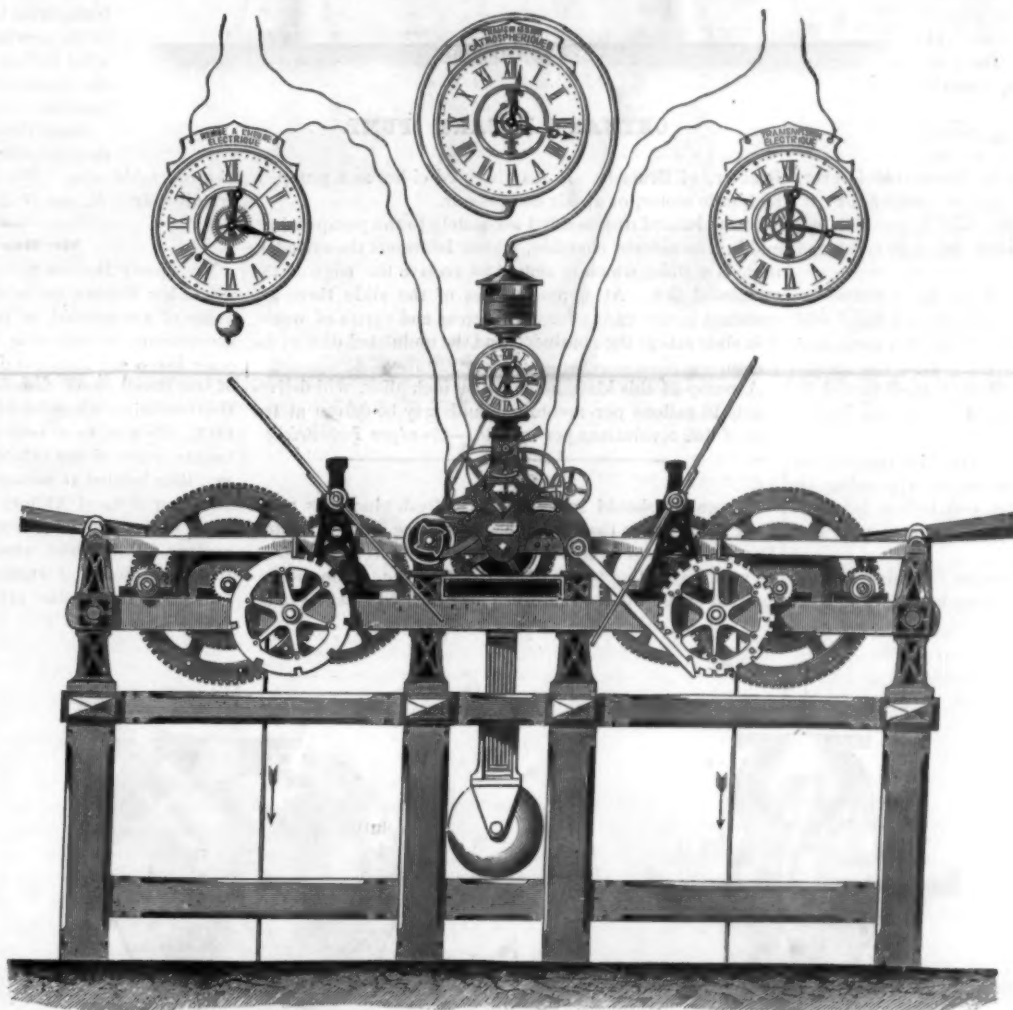

COLLEN'S PNEUMATIC CLOCK.

matched boards not over an eighth of an inch wide. Paintings, with gilt frames, and lace curtains adorn the apartment, which is complete in all the details belonging to a drawing room. A similar exhibition in Brooklyn recently gave no evidence of the skillful labor attributed to Bergmann's work, as described above. Whether it was the same or not, we do not know.

## Anthracite Coal in Mexico.

According to the *San Francisco Mining and Scientific Press* Sonora possesses a vast field of anthracite coal—the only anthracite yet discovered on the Pacific coast. It is said to belong to a very old geological formation, probably Silurian or Devonian. The only outcrop which is at present worked lies about 120 miles northeast of Guaymas, and a branch line of the Sonora railway is contemplated to develop it. The mine is a few miles north of the flourishing mining towns of La Barranca and Los Bronces, each supporting some 2,000 inhabitants. The coal has been used for two years for steam purposes at the Barranca quartz mill, it containing less ash and leaving no clinkers on the grate. It burns with the short blue flame of carbonic oxide, which is



fore. I now put the pony to full work, and he stands it well. He is more sure-footed; his tread is almost noiseless; his hoofs are in no danger from the rough hand of the farrier; and the change altogether has been a clear gain, without anything to set against it. My pony, I may add, was between four and five years old—rising four, I fancy, is the correct phrase. He had been regularly shod up to the present year."

#### RECENT MECHANICAL INVENTIONS.

An improved hand stamp for canceling postage stamps, and printing, dating, and marking generally, has been patented by Mr. Wm. J. Blackwell, of Waynesborough, Va. The press has a cam shaft which moves the stamping devices, and a sliding plate, in such a way that when the plate is moved back to uncover the ink pads the canceling stamps are forced down upon the pads.

An improved brake for wagons has been patented by Mr. William de Ray, of Murray, Ky. It is constructed so that it will be applied by the team in holding back, and will be taken off as the team draws forward. It is provided with means for locking it in either position.

Mr. John H. Jenner, of Leavenworth, Ind., has patented an improved brake lever for wagons. It consists of two levers, the principal one fulcrumed to the wagon body or frame, and the other pivoted to it and connected with the brake rod. The slack motion is taken up by the second lever, and the brake is applied by the principal lever.

An improvement in magazine firearms has been patented by Mr. Peder Bergersan, of Cheyenne, Wyoming Ter. The breech mechanism is opened and closed by means of a lever hung on a pin that passes through ears projecting from the underside of the trigger plate. The firing bolt or hammer is straight and is operated by a spiral spring. The gun may be used as a magazine gun or as a single breech loading rifle.

An improved machine for flinching, grooving, and beveling barrel staves when set up in barrel form, has been patented by Mr. Thomas McKeever, of Pittsburg, Pa. It consists in a hollow cutter head carrying the grooving and crozing knives, and in peculiar mechanism for holding the barrel while being grooved and crozed.

Mr. C. Sullivan, of Three Rivers, Mass., has patented an improved spooling guide, which consists of a flanged and slotted head in which is a slotted plate held in a horizontal position by set screws. From this plate rises the guide, which is composed of two crescent shaped arms turned in opposite directions; with this device the yarn can be fed very evenly.

Mr. Wilson N. Fort, of Lewisville, Ark., has patented an improved rotary engine, which consists in a peculiar arrangement of a double rock valve, and hollow inlet and outlet valves, the whole being arranged with a view to simplicity and durability.

Messrs. John E. Duncan and Alanson B. Alden, of Escobedo, Wis., have patented a permutation lock, in which the combination is set by the act of locking, and in unlocking the parts are readjusted, so that the combination is not set while the lock is unlocked.

An improved hair trigger for firearms, which is complete in itself and may be applied to any kind of firearm without change in its construction, has been patented by Mr. Emil A. F. Toepperwein, of Boerne, Texas.

Messrs. N. B. Gunn and A. D. Mendenhall, of Elwood, Ind., have patented an improved apple corer and cutter, in which the tube and its radial knives are detachably secured to the slotted sliding board, so that the machine may be readily taken apart for cleaning.

An improvement in gun locks, patented by Mr. Thomas Duncan, of West New Annan, Nova Scotia, consists in a stop pivoted under the end of the mainspring close to the swivel and controlled by the trigger and a spring.

Mr. F. H. Purenton, of Brunswick, Me., has invented an improved sectional steam boiler, having a lower section or water chamber surrounding the fire chamber, and connected with an upper section by means of inclined pipes, the said upper section being provided with curved flues that communicate with the smoke stack.


#### Spontaneous Combustion.

The St. Louis Republican gives this account of the origin of a recent mysterious fire in that city: A well authenticated case of spontaneous combustion occurred recently in the suburbs of Oak Hill, the residence of Mr. Edward Mead,

the jeweler, furnishing the sensation. The circumstances of the fire were, fortunately, such as to leave no doubt regarding its cause, and these circumstances are especially interesting in a city where fires of a mysterious origin have been remarkably frequent. The fire proved to be the result of spontaneous combustion, and from a cause which has been the one usually credited with effects of the kind. Some of the floors in Mr. Mead's house had lately received a thorough coating of colored varnish, and, in the polishing, hemp cloths (squares cut from sacks) had been used. One of these sacks, saturated with the varnish, had been put in the basket for further use. It had of itself smoldered, and finally produced the fire. The case is a curious one, and of value from the knowledge it affords of a dangerous combination.

#### A NOVEL ROTARY PUMP.

Ortman's rotary pump, which is shown in the accompanying engravings, is made by Messrs. Van Goethen &

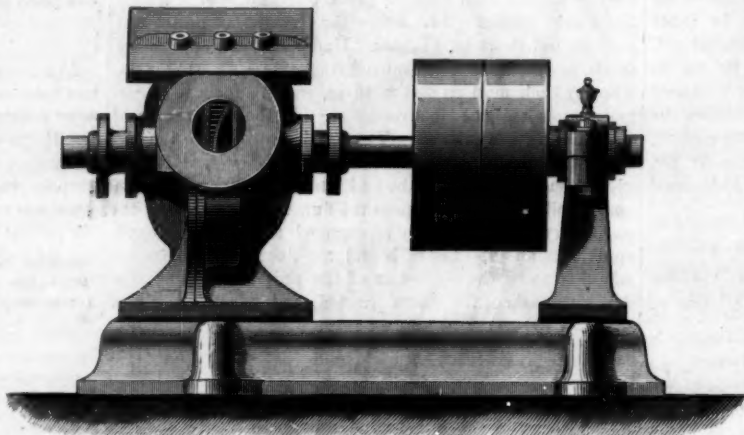

ORTMAN'S ROTARY PUMP.


Reallier, of Brussels. It may be used either as a pump, a hydraulic motor, or an air compressor.

An undulated disk is fitted accurately to the pump casing, and in a transverse chamber, which intersects the cylinder, there is a slide, which is slotted to receive the edge of the undulated disk. At opposite sides of the slide there are openings in the casing for the ingress and egress of water. The slide acts as the abutment, and the undulated disk as the piston.

A pump of this kind, having a 39 inch disk, will deliver nearly 18 gallons per revolution and may be driven at the rate of 150 revolutions per minute.—*Cronique Industrielle*.

#### Glue.

Carpenters should remember that fresh glue dries much more readily than that which has been once or twice melted. Dry glue steeped in cold water absorbs different quantities of water according to the quality of the glue, while the proportion of the water so absorbed may be used as a test of the

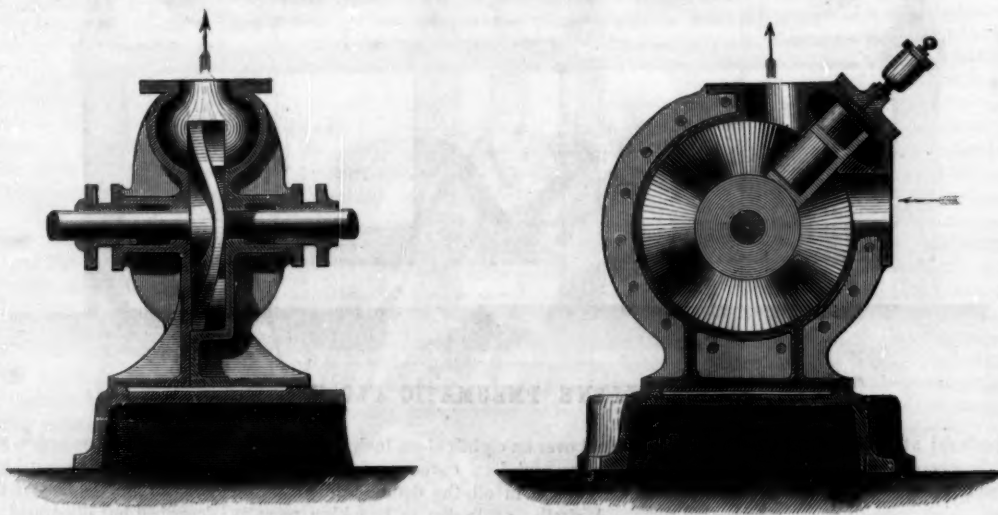

ORTMAN'S ROTARY PUMP.—VERTICAL SECTIONS.

quality of the glue. From careful experiments with dry glue immersed for twenty-four hours in water at 60° Fah., and thereby transformed into a jelly, it was found that the finest ordinary glue, or that made from white bones, absorbs twelve times its weight of water in twenty-four hours; from dark bones, the glue absorbs nine times its weight of water; while the ordinary glue, made from animal refuse, absorbs but three to five times its weight of water.—*Building News*.

#### Carriage Pigeons.

The carrier-pigeon service is now in full operation in France. The number of birds fed by the government is 6,000. These pigeons are located in Paris and twelve other large fortified towns. A number of soldiers and officers

have been taught the art of pigeon breeding, and carriers are constantly sent from place to place. The Minister of Public Instruction and the Minister of Agriculture have established prizes for pigeon races.

#### Splitting Paper.

It is one of the most remarkable properties of that wonderful product, paper, that it can be split into two or even three parts, however thin the sheet. We have seen a leaf of the *Illustrated News* thus divided into three parts, or three thin leaves. One consisted of the surface on which the engravings are printed; another was the side containing the letter press, and a perfectly blank piece on each side was the paper that lay between. Many people who have not seen this done might think it impossible; yet it is not only possible, but extremely easy, as we shall show.

Get a piece of plate glass and place on it a sheet of paper; then let the latter be thoroughly soaked. With care and a little dexterity the sheet can be split by the top surface being removed. But the best plan is to paste a piece of cloth or strong paper to each side of the sheet to be split. When dry, violently and without hesitation pull the two pieces asunder, when part of the sheet will be found to have adhered to one and part to the other. Soften the paste in water and the pieces can be easily removed from the cloth.

The process is generally demonstrated as a matter of curiosity, yet it can be utilized in various ways. If we want to paste in a scrapbook a newspaper article printed on both sides of the paper, and possess only one copy, it is very convenient to know how to detach the one side from the other. The paper, when split, as may be imagined, is more transparent than it was before being subjected to the operation, and the printing ink is somewhat duller; otherwise the two pieces present the appearance of the original if again brought together.

Some time ago the information of how to do this splitting was advertised to be sold for a considerable sum. We now impart it to all our readers gratuitously.—*B. and O. Printer and Stationer*.

#### Mr Henry Bessemer.

Mr. Henry Bessemer, of Denmark-hill, Camberwell, on whom her Majesty has been graciously pleased to confer the honor of knighthood, in recognition of his services in the manufacture of malleable iron and steel, and in numerous other inventions, is a son of the late Mr. Anthony Bessemer, of Old Broad street, London, and subsequently of Charlton, Hertfordshire, where he was born on the 19th of January, 1813. He was, to a very great extent, self-taught, and at twenty years of age exhibited a design at the Royal Academy, then located at Somerset House. He first attracted the attention of Lord Althorp, then Chancellor of the Exchequer, by an ingenious contrivance which he made for preventing frauds which were carried on upon a large scale by the transference of stamps from old documents to new ones; but, though the saving to the public purse was estimated at nearly £400,000 a year, he never received any remuneration for his ingenuity.

In 1856 he read before the British Association, at Cheltenham, his first paper on the manufacture of malleable iron and steel, which has given him a world-wide name—literally so, for the Americans have christened after him a thriving new town on the Cincinnati Railway, and "Bessemer metal" has become current in most of the languages of civilized communities. Mr. Bessemer's great inventions have been recognized both at home and abroad, for the Emperor of Austria conferred on him the rank of a Knight Commander of the Order of Francis Joseph, and the late Emperor of the French offered to his acceptance the Grand Cross of the Legion of Honor, in consequence of a report from the

jurors of the Universal Exhibition of 1867 that his invention was of exceptional merit. He has also been the recipient of the Albert Gold Medal, presented to him by the hand of the Prince of Wales. It is stated by Blanch, in his "History of Camberwell," that in the course of his various experiments, Mr. Bessemer has taken out more than one hundred patents, and has paid to the Crown as much as £10,000 for stamps alone.

A PLAGUE of locusts fell upon the province of Caucasus, Russia, during April. Vineyards and fruit gardens were utterly destroyed. The water courses were choked by the swarming pests, and the village streets were so blocked by them that the shops were shut and all traffic suspended.



## Self-Defense among Plants.

One of the means of self-defense among plants, says Dr. Francis Darwin, in a recent lecture, is the presence of poisonous alkaloids. Thus ruminants will not eat such plants as nightshade (*belladonna*), monkshood (*aconite*), hellebore, thorn apple (*stramonium*), peony, veratrum, and hemlock (*conium*). Many plants are protected by their poisonous milky juices, as the spurges (*euphorbia*), poppy, celandine, and others. In the *strychnos nuxvomica*, the poisonous alkaloid strychnia is contained in the seeds, its whole object being to prevent them and the young plants contained in them from being injured, the fleshy parts of the fruit being quite harmless and eaten by the natives. This eatable part surrounding the seeds entices birds to swallow them, that they may be distributed after and by passing through the animals' bodies. Bitter almonds are comparatively safe from the attacks of mice, whereas sweet almonds are much injured by them. In addition to an almost endless series of poisonous plants, there are those which contain essential oils having a pungent aromatic odor or taste. Thus the fennel, anise, caraway, and others have otherwise unprotected seeds, which are safe from the attack of birds on this account. In Brazil the lime alone of all the orange tribe is distasteful to the leaf-cutting ants, probably owing to an oil similar to that which gives the strong taste and odor to orange peel; and this fact has decided the fate of the tree, for it is the only species of the tribe which has been able to establish itself beyond the limit of cultivation, the orange, citron, etc., growing only where protected by man. Turpentine in fir leaves serves as a protection against cattle. The aromatic flavor of mint is a defense against browsing animals, and as it is frequented by a large number of insects it affords an analogy to the nettles and thorns, which are resorted to by butterflies and birds to rear their young. Flowers are usually more acid than the plants which bear them, and are thus protected from destruction by browsing animals and other foes, by being uneatable. Caterpillars will die of hunger rather than eat the flowers of the plants whose leaves form their natural food.

## Crickets Stop a Train.

One cricket would stand a poor show trying to stop a railroad train, but millions of them can do it. The western bound railroad train, No. 6, met an army of crickets at Clarke's Station, about 15 miles west of Reno, says the *Gazette*, and was detained two hours and a half trying to get through. To make the passage the train men were finally forced to take brooms and sweep the insects off the rails. The crickets covered the track for about three miles, and when the driving wheels of the engine would strike them they would whirl around without going forward an inch.

## THE ELEPHANT SHREW.

Several species of elephant shrews are known to exist, all of which, with one exception, are inhabitants of Southern Africa. The solitary exception, *Macroscelides Roretii*, is found in Algeria.

The peculiarly long nose of the elephant shrew is perforated at its extremity by the nostrils, which are rather obliquely placed, and is supposed to aid the animal in its search after the insects and other creatures on which it feeds. The eyes are rather large in proportion to the size of the animal.

The tail is long and slender, much resembling the same organ in the common mouse, and in some specimens, probably males, is furnished at the base with glandular follicles, or little sacs. The legs are nearly of equal size, but the hinder limbs are much longer than the fore legs, on account of the very great length of the feet, which are capable of affording support to the creature as it sits in an upright position. As might be presumed from the great length of the hinder limbs, the elephant shrew is possessed of great locomotive powers, and when alarmed can skim over the ground with such celerity that its form becomes quite obscured by the rapidity of its movement through the air. Its food consists of insects, which it captures in open day.

Although the elephant shrew is a diurnal animal, seeking its prey in broad daylight, its habitation is made below the surface of the ground, and consists of a deep and tortuous burrow, the entrance to which is a perpendicularly sunk shaft of some little depth. To this place of refuge the creature always flies when alarmed, and as it is so exceedingly swift in its movements, it is not readily captured or intercepted.

The color of the fur is a dark and rather cloudy brown, which is warmed with a reddish tinge upon the sides and flanks, and fades on the abdomen and inner portions of the limbs into a grayish-white. The generic name, *Macroscelides*, is of Greek origin, in allusion to the great length of its hinder limbs, and signifies "long legged." It is but a small animal, as the length of the head and body is not quite four inches in measurement, and the tail is about three inches and a quarter.

## THE THICK-THIGGED WALKING STICK.

BY PROF. C. V. RILEY.


During the past few years the forests in parts of New York have been very seriously injured by the insect herewith treated of, and which has hitherto been considered quite harmless by writers on entomology. An account of it will appear in my forthcoming report to the Department of Agriculture, from which I condense some facts in advance. Owing to its curious, slender, long-legged, slow-moving characteristics it has been popularly dubbed the "Walking

THE THICK-THIGGED WALKING STICK.—(*Diaperomera femoralis*, Say.)

a, eggs, ventral view; b, do., side view, enlarged; c, do., in various positions, showing young; hatching; d, d, male, back and side views; e, female, side view—natural size (after Riley).

Stick," "Stick Bug," "Specter," while in some localities it is known as "Prairie Alligator," "Devil Horse," and other odd cognomens, generally indicative of its appearance, and of a superstition which is quite prevalent, but most unfounded, that it is poisonous and can sting or bite.

The popular name above employed will serve to distinguish it from another tolerably common species, the two-striped walking stick (*Anisomorpha buprestoides*, Stoll).

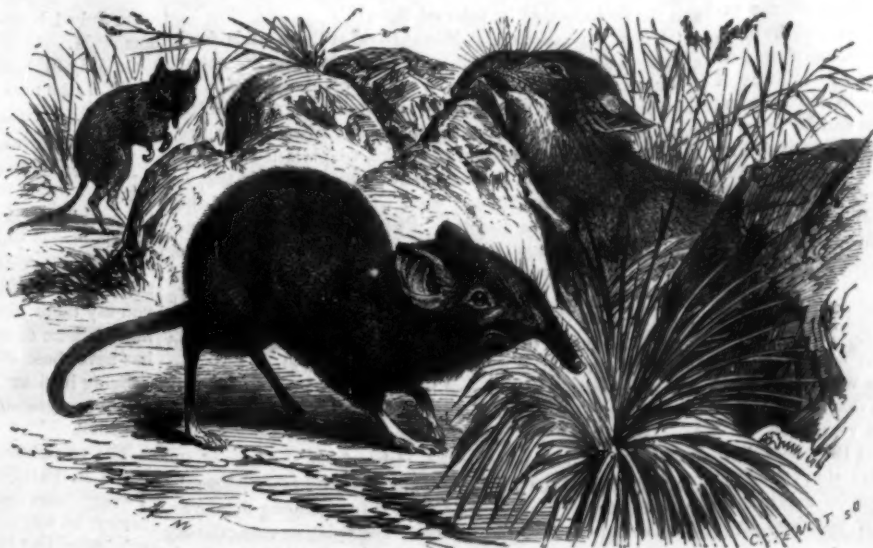ELEPHANT SHREW.—(*Macroscelides Proboscidea*.)

The colors of the adult are quite variable, and are generally obliterated in cabinet specimens; shades of gray, brown, and greenish brown predominate, the head of the male being pale and having three longitudinal fuscous stripes, and the middle thighs having annulate shades of the same color. The front legs of the male and the shanks of the others are almost always green. The colors of the female are more uniform, generally grayish, with paler specks and mottlings on the head and along the back; but occasionally pale green predominates. Structurally the male is at once distinguished by his shorter, more slender body; his longer legs and feel-

ers; his narrower and less dilated front thighs; his swollen middle thighs, and by the greater stoutness of the spines near the ends of the middle and hind thighs, these and the other distinguishing sexual characters being less obvious in the earlier stages of growth.

As already stated, this insect has until within a few years always been considered harmless. In 1873, however, while lecturing at Cornell University, I noticed that it was unusually abundant around Ithaca, and it was there reported as doing considerable injury to rose bushes; and the following letters from correspondents will show how very destructive the species may become:

"Inclosed find specimens, male and female, of an insect which is proving to be a scourge. About the middle of June I discovered, mostly on standing grass, this same insect, only very much smaller, of a light pea-green color, but not in sufficient numbers to be thought of as a pest. I noticed about August 15th, in the reservation of young timber, mostly white oak and hickory, a few trees having the appearance of being burned just enough to kill the leaves. On closer investigation I found many of these insects devouring the leaves. Later I judged at least 25 acres were completely stripped of foliage, as much so as if fire had run through the wood and killed every tree. They seemed to have no choice as to what variety of timber they attacked. There were many in my peach orchard and lawn. On single trees far removed from my timber lot they were as thick as could well be, in many places in heaps. Fences adjoining the timber were fairly covered with them. They have been known for years in this vicinity, but were heretofore always considered harmless. From present appearances they are greatly to be feared as a scourge, consequently anything relating to them will be read with great interest. I hear from them in Florida, but not in such numbers as here."—G. C. Snow, Yates Co., N. Y., in *New York Weekly Tribune*, Nov. 11, 1874.

"About forty years ago my father set out a grove of locust trees for fencing purposes at the foot of a rocky wooded hill. The trees thrived, and for years have furnished the farm with posts and stakes. When they were young we began to notice on them, now and then, the insects known as 'Walking Sticks,' and some fifteen years ago they began to increase rapidly, appearing in summer on the locusts, to which at first they seemed to confine themselves, entirely stripping them of their leaves, and have done so every second year since.

"The locusts have nearly all succumbed to the repeated attacks of the repulsive looking pests, which have for some time extended their operations to the adjoining native trees, most kinds of which they feed upon ravenously.

"I have never by observation been able to discover when or where the eggs are deposited, nor can I find more than a description of the insect in any book within my reach. Will you throw a little light on the subject, and can you suggest any method of destroying these pestiferous walking sticks?"—R. E. R., Ferrisburg, Vt., in *Rural New Yorker*, November 7, 1874.

"In June last we gave an account of a remarkable visitation of myriads of the insect known as the walking stick (*Spectrum femoralis*) in Yates County, N. Y., and asked for information as to the appearance elsewhere. The following, from Mr. E. H. Conklin, Cumberland County, Pa., is the first response, which we hope may call out others. Mr. C. says: 'This insect, though not at all common and seldom numerous, has made its annual appearance in our peach orchards for forty years, and only once in this time have they been so numerous as to be injurious. In this instance, which was about ten years ago, these insects denuded a row of locust trees that formed a shelter on the northwest side of a peach orchard. For half a dozen rods from this locust row the peach trees were also stripped of their leaves. Previous to this time we never saw them on any other tree except the peach. As to color, some are light green and others brown, amongst male and female. The female has a much heavier body than the male.'"—*American Agriculturist*, August, 1877.

A further account of great injury to oak timber by this insect on Mr. Snow's farm was given in the *American Agriculturist* for June, 1877, and when applications were made through the editor of said journal for more definite information and for some practical recommendation, so little was any one able to comply with such a request, I deemed the matter of sufficient interest and importance to warrant further investigation. A couple of visits to Esperance farm enabled me to clear up the insect's natural history, and suggested, as the sequel will show, a simple and feasible means of preventing its injuries. Mr. Snow has about 50 acres of

woodland, consisting of fine young trees, mostly the second growth of hickory and of different species of oak. In 1874 the trees on about 25 acres were totally defoliated. In 1875 the insects appeared in fewer numbers. In 1876 they were even more numerous than in 1874, and covered a large area. In 1877 again they attracted less attention, while last summer I found that Mr. Snow's accounts were by no means exaggerated. By the middle of August the bulk of the pests were going through their last moult, and by the end of autumn they had stripped most of the trees, showing, however, a decided preference for the black, red, and rock chestnut oaks, to the white oaks and hickories, which they affect but little till after the first mentioned trees are stripped. The underbrush was also very effectually cleaned of its foliage, and the insects hung from and clung to the bare twigs and branches in great clusters. They settle freely to roost

on the witch-hazel, but do not defoliate it until the other trees mentioned are pretty bare. Sumac and thorn are also little affected, while peach and apple, in an adjoining orchard, were untouched. Whenever they have entirely stripped the trees and shrubs they move in bodies to fresh pastures, crowding upon one another and covering the ground, the fence rails, and everything about them, so that it is impossible for a person to enter the woods without being covered by them. The timber affected can be recognized by its seared and leafless appearance from a great distance, and upon entering the woods the ear is greeted by a peculiar



seething noise, resulting from the motion of the innumerable jaws at work on the leaves. Their depredations first begin to attract attention soon after wheat harvest, and are most noticeable in September. The injury to the trees done in 1874 and 1876 was manifest in the death of most of the black oaks, and, according to Mr. Snow's observations, trees die in three years after the first attack.

The unexampled multiplication and destructiveness of this insect at Esperance farm is but one of the many illustrations of the fact long since patent to all close students of economic entomology, that species normally harmless may suddenly become very injurious.

The winter habits of the species have not before been published. The eggs, which were first briefly described by me in 1874,\* are 2-3 mm. long, oval in shape, slightly compressed at the sides, and of a polished black color, with a ventral whitish stripe. They look not unlike some plump diminutive leguminose seed. They are simply dropped loosely upon the ground from whatever height the females may happen to be, and, during the latter part of autumn, when the insects are common, one hears a constant pattering, not unlike drops of rain, that results from the abundant dropping of these eggs, which in places lie so thick among and under the dead leaves that they may be scraped up in great quantities.

From general observation of specimens kept in confinement it would appear that each female is capable of laying upward of a hundred. The eggs remain on the ground all through the winter, and hatch for the most part during the month of May. Some of them, however, continue hatching much later, so that all through the summer, and even into the fall, young individuals appear. The young walking sticks measure at birth 4-5 mm., and with their feelers and legs outstretched nearly double that length. They are invariably, during early life, of a uniform pale yellowish green color, and as they have a habit in their earlier days of keeping near the ground, this, coupled with a great readiness to drop whenever disturbed, serves to protect them from observation. They may for these reasons occur in great numbers in the early part of the season without being suspected. The exact number of moults that the insect passes through has not been carefully studied, but it changes very little in appearance from birth to maturity, except so far as color is concerned. With age the green color gives way to various shades of gray and brown. In this way we find great correspondence with its surroundings. While the vegetation is green the specters are green also. When the foliage turns in autumn they change color correspondingly, and when the foliage is stripped they so closely resemble, in both appearance and color, the twigs upon which they rest—the habit of stretching out the front legs and feelers greatly enhancing the resemblance—that when they are few in numbers it is difficult to recognize them. A few green specimens, more particularly of the males, may always be found, even among the mature individuals.

In contemplating these singular creatures and their wonderful resemblances to the oak vegetation upon which they occur, one cannot help noticing still further resemblances. They are born with the bursting of the buds in the spring; they drop their eggs as the trees drop their seeds, and they commence to fall and perish with the leaves, the later ones persisting, like the last leaves, till the frost cuts them off.

As will have been already noticed, Mr. Snow has found from his own observations that the insects were injuriously abundant every other year, and I have been interested in endeavoring to find an explanation of this fact. The increase of the insect's natural enemies whenever they become excessively abundant, and the consequent decrease of the plant feeder the following year, undoubtedly have something to do with it; but there is also good evidence that a great many of the eggs remain on the ground for two consecutive winters before hatching. Messrs. T. W. Bringham and L. Trouvelot have both found from experience that the eggs of this insect for the most part hatch only after the interval of two years,† and an examination made of a large number which I have myself kept the present winter shows that while some have proceeded far into embryonic development, others show no development whatever, thus corroborating the experience of these gentlemen.

We may very justly conclude, therefore, that the species will only be injurious every alternate year.

While the specters are young they may be destroyed by sprinkling the underbrush in the timber with Paris green water whenever the timber is inclosed, so that domestic animals can be kept away from the poisoned vegetation.

The most satisfactory means of averting the insect's injuries, however, will be found in the destruction of the eggs during winter. This may be done either by digging and turning them under, or by burning over the dead leaves among which they lie.

#### Ichneumon Flies.

It is an interesting fact that not a single ichneumon fly is known to attack our locust, nor has one ever been found to attack any of the different locusts or grasshoppers that occur in the country. We have sought diligently for evidence of the occurrence in locusts of any of these essentially parasitic insects. By ichneumon flies we intend not those of the genus *Ichneumon* alone, but any belonging to the great family *Ichneumonidae*. They are known to attack plant-feeding

species of all orders except the half winged bugs (*Heteroptera*) and the straight winged insects (*Orthoptera*), to which last the locust belongs. Westwood, St. Fargeau, Brullé, and other authors who have paid especial attention to these ichneumon flies, all concur in excepting the orthoptera from their attacks.

Von Motschulsky speaks of having found a species (*Proctotrupes brevipennis*, Latr.) of an allied family near Italian locusts; and infers, without proof whatever, its possible parasitism thereon; but of the latest and most reliable European authorities—Gerstaecker and Köppen—the former states explicitly that no ichneumon is known to attack the European locust; while the latter knows of none, and refers only to rumors of the occurrence of bee-like insects that sting the locust, and which rumors doubtless have reference to digger-wasps or tachina flies. Again, Mr. Thomas Bath,\* in treating of the injuries of locusts in Australia, one species of which (given as *Ordipoda musica*, Fabr.) in size and general appearance is not unlike our *Spretus*, figures an ichneumon fly (given as *Bracon capitata*) stinging a locust, and certain maggots, supposed to be the larvæ of the same, taken from a locust. But the former is imaginary, unreal, and evidently not from actual observation, while the latter are the larvæ not of an ichneumon, but of some dipterous (doubtless *Tachina*) fly.

Coming to our own country: Mr. Brous, in 1876, sent us two ichneumons—a *Campoplex* and *Ephialtes notanda*, Cresson—noticed flying about locusts, but without evidence of their stinging these; and Prof. Aughey has sent us a female *Lampronota brunnea*, Cresson, which he believes to have bred from winged specimens of *Spretus* in August, 1874. But his notes lack in absolute certainty, and he himself, on that account, refrained from referring to the supposed fact; while the long ovipositor and well known habit of some species of the genus of preying on wood boring coleopterous larvæ, to reach which the ovipositor is admirably adapted, strengthen the uncertainty and render further corroborative evidence necessary before we can say that any ichneumon fly actually preys on the Rocky Mountain locust. Reports from farmers of ichneumon flies attacking locusts are not uncommon, because this term is often erroneously applied to any parasite, and especially to the tachina flies and the anthomyia egg parasite, already treated of. Some writers have even sought to justify its application to this last species on the ground that the term ichneumon means an egg feeder, unaware of the fact that it has a definite meaning in entomology, and that while originally applied by Aristotle to an Egyptian animal (*Hespestes ichneumon*, L.) that hunts for and feeds on crocodile eggs, it was also applied, both by Pliny and Aristotle, to a wasp that hunts spiders and caterpillars, for which reason Linnaeus appropriately used it to designate the parasitic family we have been considering.—*First Report U. S. Entomological Commission.*

#### Mount Hood Smoking.

In its issue for May 26, the *Bee*, of Portland, Oregon, says that on the previous day a cloud of smoke hung upon the south side of Mount Hood, far above the snow line and climbing almost to the summit.

"The smoke cloud changed form and movement constantly, apparently pouring out of the south side of the mountain from half to one quarter of a mile below the summit. Those who have ascended the mountain locate the site of an old crater on the southwest side, some distance below the summit. They have to cross this locality to make the ascent, and always find sulphurous fumes issuing from the crevices, and the rocks heated by internal fires.

"There is no doubt that Mount Hood at times sends forth eruptions of smoke, though such manifestations are not of frequent occurrence, or at least are not often reported. We have lived within view of the mountain for nearly thirty years, and have only once before, about fifteen years ago, seen unmistakable emission of smoke, which lasted about an hour, and came from the same part of the mountain that we observed it on May 23, and each time the fact of its being smoke was not to be doubted. Fifteen years ago the phenomenon occurred upon a winter day, when the sky was blue, without a speck of cloud to fleck it, and the smoke streamed northward from the mountain in a dense black cloud. We have seen the time when excitement was created some years ago by the rumor that Mount Hood was smoking. A crowd gathered on a high roof and observed it with glasses, but the phenomenon was caused by atmospheric conditions that drew mists and fogs from the lower gorges, and made them wreath around the summit. The difference between this light colored, enveloping mist, rising from the base of the mountain, and the black, sulphurous appearance of smoke pouring directly out of the side of it from among the snows, was evident to any practical eye. Yesterday morning the sky was clear, with a slight haze and a few light, fleecy clouds hanging above the Cascade range at intervals, but the whole base and summit of Mount Hood were clear of them, while the unmistakable wreath of sulphur smoke hung just below the very summit, remaining there for over two hours, conformed by the movement of the winds. Toward noon fleecy clouds enveloped the mountain, and for a while the difference between cloud and smoke was distinctly visible, but afterward the outlines of the snowy peak were obscured, and when they were plain again, at 2 o'clock P. M., there was no smoke to be seen."

#### Astronomical Notes.

OBSERVATORY OF VASSAR COLLEGE.

The computations in the following notes are by students of Vassar College. Although only approximate, they will enable the ordinary observer to find the planets.

M. M.

#### POSITION OF PLANETS FOR JULY, 1879.

##### Mercury.

On July 1 Mercury rises at 5h. 37m. A.M., and sets at 8h. 36m. P.M.

On July 31 Mercury rises at 7h. 19m. A.M., and sets at 8h. 16m. P.M.

Mercury can be seen after sunset all through the month of July. In the early part of the month it keeps nearly the path of the sun; later it should be looked for south of the point of sunset. Mercury may be seen east of the crescent moon July 30. It is at its greatest elongation east of the sun on July 27.

##### Venus.

Venus rises at 8h. 17m. A.M. on July 1, and sets at 10h. 5m. P.M.

On July 31 Venus rises at 8h. 40m. A.M., and sets at 9h. P.M.

On July 8 Venus passes near to the planet Uranus, but moves rapidly toward the east. Venus will be at its greatest elongation on July 16, and near the crescent moon on July 23.

##### Mars.

The three bright planets, Mars, Saturn, and Jupiter, can all be seen at a late hour in the evenings of July. Mars and Saturn rise nearly at the same time for several mornings in the first week of July, but Mars moves quickly eastward and northward, and separates from Saturn.

On July 1 Mars rises at 10m. after midnight, and sets at 38m. after noon.

On July 31 Mars rises at 10h. 57m. P.M., and sets at 16m. after noon of the next day.

##### Jupiter.

On July 1 Jupiter rises at 10h. 46m. P.M., and sets at 9h. 49m. A.M. of the next day.

Jupiter is near the moon on the 8th.

On July 31 Jupiter rises at 8h. 45m. P.M., and sets 7h. 44m. A.M. of the next day.

At this time Jupiter rises as Venus sets.

On July 31 Jupiter, Saturn, and Mars can be seen to rise before midnight. Jupiter will be known by its size and brilliancy, Saturn by its white light, and Mars by its ruddy glow.

##### Saturn.

On July 1 Saturn rises at 0h. 10m. A.M., and sets at 36m. after noon.

On July 31 Saturn rises at 10h. 10m. P.M., and sets at 10h. 37m. of the next day.

Saturn and Mars are in close proximity on the 1st, but Mars will be seen to move east of Saturn and northward.

##### Uranus.

Uranus may perhaps be found with an ordinary glass by its nearness to Venus. On July 8 Uranus has the same right ascension as Venus, but is 15 minutes of arc south of Venus. On the 9th Venus has moved eastward and toward the south, and Uranus is left west of Venus and in higher northern declination.

On July 1 Uranus sets at 10h. 18m. P.M., a few minutes after Venus.

On July 31 Uranus sets at 8h. 24m. P.M.

##### Neptune.

On July 1 Neptune rises at 1h. 12m. A.M., and sets at 2h. 53m. P.M.

On July 31 Neptune rises at 11h. 11m. P.M., and sets near 1h. P.M. the next day.

#### The Manufacture of Phosphorescent Substances.

A correspondent who resides in Paris sends us the following:

I read in the *SCIENTIFIC AMERICAN* a notice in which you mention some phosphorescent powders that you found on luminous clock dials. Having ascertained by analysis that this phosphorescent matter is nothing but sulphide of calcium, you say there must be something or other in the mode of manufacture of this substance to give it such a brilliancy as has never been obtained before.

Being in situation to know much about this subject I think it will be agreeable to you if I give you some details on this question.

The phosphorescent matter of the luminous dials is prepared in Paris; the maker is M. André, 39 Rue Lacépède. Twenty years ago, being famulus in Mr. E. Becquerel's laboratory, he was taught by him how to prepare phosphorescent sulphides, and then began to make them for the chief instrument makers in Paris.

The first products obtained had but little intensity; but gradually M. André became more and more skillful in his work, and three years ago he was able to produce the substance you have seen on the dials. Such a wonderful result was obtained only by carefully studying the mode of manufacture, and depending only on a few tricks of hand. This I can affirm, but I cannot give you the details of the manipulation, which are kept secret.

M. André does not make only the blue violet powder used for dials; this color has been chosen for that because it keeps luminous a longer time. But the results are almost as good with yellow, yellow-green, green, and orange powders.

\* New York Weekly Tribune, November 11, 1874.

† Proc. Ent. Soc. Nat. Hist., Vol. XI, pp. 88 and 89.

\* Notes on observations made during the late "Locust Plague." Report of the Secretary for Agriculture, Melbourne, 1873.



**Alleged Discovery of Ancient American Carvings.**

The *Pioneer Press* (St. Paul, Minn.), announces the discovery of a remarkable cave on the farm of David Samuels, 10 miles from La Crosse. The cave is 80 feet long, 18 feet wide, and about 8 feet high. Above the quarry sand, which has evidently drifted in and covered the floor to the depth of three to six feet, upon the walls, are very rude carvings representing men, animals, arms, and implements, and some appear to be hieroglyphics. One picture represents men, with bows and arrows, shooting animals, three buffaloes and one rabbit. Another represents three animals, which, if large, must have been like the hippopotamus; another appears to represent a mastodon; on another picture a moose is quite plainly delineated. There are eight representations that are canoes, much carved, or hammocks, which they more resemble. One sketch of a man is very plain; the figure wears a kind of chaplet or crown, and was probably chief of his tribe or clan. There are many fragments of pictures, where the rock had decomposed. The rock is a coarse, soft, white sandstone. On one side of the cave is a space about 2 feet high and  $2\frac{1}{2}$  feet in length, made into the wall. Above are the upper fragments of pictures, and below are lower fragments, showing that they were made when the rock was entire. From the depth to which decompositions reached in this dry and dark cavern, the inscription must be quite ancient. If the carving mentioned really represents the mastodon, the work must have been done by mound builders.

The accumulated sand needs to be removed to get a full view, and possibly human remains may be found. The entrance to the cave had evidently been covered by a landslide, there being left open only a small hole, where traps have long been set for coons. The large number of these animals that were caught led to the belief that the space inhabited by them must be large, and investigation led to the discovery of the cave. It is stated that over the entrance, since the landslide, a poplar tree, 18 inches in diameter, has grown, which shows that the cave has not been occupied by human beings for more than a century.


If the above statements are true, this may prove to be a rich find for our antiquarians.

**NEW DEVICE FOR SEPARATING CREAM FROM MILK.**

A novel device for separating cream from milk is shown in the accompanying engraving. It consists of a can for containing milk, to which is fitted a pan for containing water. The can is provided with an airtight cover, from which a tube projects nearly to the bottom of the water pan. In the top of this tube there is a valve, and a pump is attached to the cover immediately above the tube.

The can is filled with milk nearly to the lugs that support the water pan, and the latter is filled with water and placed in the can. The cover is then put on and fastened, and the pump is applied.

By removing the water from the pan a vacuum is created in the can which is said to greatly facilitate the raising of the cream. This device was recently patented by Mr. S. L. Plumb, of Portage, Wis.



Apparatus for Raising Cream.

**The New Austrian Explosive.**

The new explosive for military use, recently introduced in Austria, appears to have remarkable properties. It consists of Nobel's explosive gelatine (formed by dissolving gun cotton in nitro-glycerine), with camphor added in varying proportions (nominally 4 per cent). An interesting account of experiments made at the works of Zamky with this explosive is now appearing in the *Revue d'Artillerie*. From experiments on iron plates it appears that, weight for weight, it is 25 per cent stronger than the best Kieselguhr dynamite. The freezing of the charge and the priming cartridge does not diminish the inflammability and shattering force. The explosive is not sensibly altered by being under current water forty-eight hours. Fired at, in the soft state, with a rifle at twenty-five meters distance, it resists the shock; but not if frozen and placed against iron (or against wood, if frozen and containing only 1 per cent camphor). Its superiority, for military purposes, to ordinary explosive gelatine and other explosives is very marked. This new explosive is known as blasting gelatine.

**Phosphorescent Powders.**

A recent English patent is to obtain and to utilize at night the light taken or absorbed during the day time from direct or indirect sunlight, or from an artificial light, either by employing phosphorescent powders simply after exposure, or by augmenting their brilliancy by means of electricity. The composition and manufacture of the luminous products and their applications without the use of electricity, is thus described: 100 parts by weight of a carbonate of lime and phosphate of lime, produced by the calcination of sea shells, and especially those of the genus *Tridacna* and the cuttle fish bone, are to be intimately mixed with 100

parts by weight of lime rendered chemically pure by calcination, and add 25 parts by weight of calcined sea salt; from 25 to 50 per cent of the whole mass of sulphur, which incorporate therewith by the process of sublimation; and from 3 to 7 per cent of coloring matter in the form of powder composed of mono-sulphure of calcium, barium, strontium, uranium, magnesium, aluminum, or other minerals or substance producing the same physical appearances, i. e., which, after having been impregnated with light, becomes luminous in the dark. After having mixed these five ingredients intimately the composition obtained is ready for use according to different methods of application. In certain cases, and more specially for augmenting the intensity and the duration of the luminous effect of the composition, the patentees add a sixth ingredient in the form of phosphorus reduced into powder, which is obtained from seaweed by the well known process of calcination. As to proportion, it is found that the phosphorus contained in a quantity of sea weed, representing 25 per cent of the weight of the composition formed by the five above named ingredients, gives very good results.

The phosphorescent powder thus obtained and reduced into paste by the addition of a sufficient quantity of varnish, such as copal, may serve with advantage for illuminating a great number of objects, e. g., buoys, sea compasses, barometers, street plates, sign boards, and other similar objects, by arranging it in more or less thick coatings upon a plate of metal, wood, glass, or other material, covered by a transparent glass; this powder may also be employed for theatrical scenery or pictures, artificial flowers, and other similar articles by the application of one or more coatings of the powder incorporated in the varnish, or else by varnishing previously these objects and by sprinkling the dry powder upon the varnish still damp, and in this case the covering piece made of glass or other transparent material may be suppressed.

These powders are also employed for manufacturing solid objects generally made of cellulose, paper paste, papier-mache, artificial ivory, sometimes called coralline, and other materials of a similar nature, by sprinkling the surface of these objects, or only certain parts of the surface (still damp or moist) which are usually exposed to light, and by compression in moulds or otherwise in order to incorporate definitely the phosphorescent powders into the surfaces. The amount of powder applied should not exceed the thickness of a thin sheet of cardboard; it may be employed either for coating the whole surface or certain fractions thereof, so as to produce various designs, inscriptions, or effects. For this application various powders are also applied, which contain different coloring matters, so as to produce effects of various colors.

The dry phosphorescent powders are also converted into translucent flexible sheets of unlimited length, thickness, and width, by mixing them with about 80 per cent of their weight of ether and collodion in equal parts in a close vessel, and rolling the product into sheets, with which any object may be covered which is intended to be luminous in the dark.

The phosphorescent powders may also be intimately mixed with stearine, paraffine, rectified glue, isinglass, liquid silic, or other transparent solid matter, in the proportion of from 20 to 30 per cent of the former with from 50 to 80 per cent of either of these substances, and this mass is then reduced into sheets of variable length, width, and thickness, according to their intended applications. A luminous glass is also manufactured by means of the above mentioned phosphorescent powders by mixing the same in glass in a fused state in the proportions of from 5 to 20 per cent of the mass of glass. After the composition has been puddled or mixed it is converted into different articles, according to the ordinary processes; or after the manufacture of an object still warm and plastic made of ordinary glass it is sprinkled with the powders, which latter are then incorporated into the surface of the article by pressure exerted in the mould, or in any other suitable way.

It has been observed after various trials that the passage of an electric current through the different compositions augments their luminous properties or brilliancy to a great extent; this peculiarity is intended to be utilized in various applications too numerous to describe; but of which buoys form a good example. The current of electricity is furnished by plates of zinc and copper mounted on the buoy itself, when the latter is used at sea, but in rivers and fresh water inlets the battery will be carried in the interior of the buoy. To secure the full effect from 10 to 20 per cent of fine zinc, copper, or antimony dust is added to the phosphorescent powder above described. The patentees, Peiffer, MacCarty, and De Sagan, have devised a special form of buoy, which they claim is their invention, in company with the various applications above described.

**AN INVENTOR VICTORIOUS.**

Under the above heading the *Cincinnati Commercial* of June 10th says:

The suit of John L. Lewis against the Swift Iron and Steel Works of Newport, to restrain them from operating a style of rolls patented by the plaintiff, was decided yesterday in the United States Court. The decree of the court orders that Swift & Co. be for ever restrained from using any of the 14 sets of iron rollers now at the mill in Newport, Ky., and from making or using any roller of like form. It is further ordered that this case be referred to the Master to inquire and report as well the profits realized by Swift & Co.

by the use of the rollers, as the damage which Lewis has sustained, and for this purpose the two parties are to bring proof as to how long Swift & Co. have used each set of rolls, with the provision that in the absence of any proof it will be assumed that they have been in use for five years from the beginning of this suit; and as to what royalty Lewis has been receiving for the license and whether the royalty be different according to the size of the rolls. The proof is required to be furnished by the 10th of July, and the case submitted to the court on the 30th of the same month.

This patent for angle iron rolls was granted to John L. Lewis, of Pittsburg, Pa., through the *SCIENTIFIC AMERICAN* Agency of Munn & Co., and the case between the patentee and the Swift Iron and Steel Works of Newport, Ky., was carried on for a period of more than five years. The letters patent were the object of attack by able patent lawyers, and the case drew considerable attention among iron manufacturers, West and Southwest. It is rarely, perhaps, that a specification is subjected to the test so long continued as was the Lewis patent, but it stood the test well.

**Industrial Art in New York.**

Hitherto there has been no museum in this city which has given any special attention to the applications of industry to art and art to industry. This want the trustees of the Metropolitan Museum have determined to supply, and have devoted a portion of the new art building, in Central Park, to collections illustrating industrial art. They propose to begin with the applications of metals. Valuable gifts have already been received, others are promised, and more are earnestly solicited. Professor Thomas Egleston, of the School of Mines, Columbia College, has been authorized to receive such donations. Communications relating to the matter may be sent to him or to the Director of the Museum, Gen. Di Censola. The department is an important and useful one, and it is to be hoped that contributions will be liberal.

**Disastrous Earthquake in Sicily.**

The region about Mount Etna was shaken by a violent earthquake June 18. Five villages near Aci Reale, a few miles northeast of Catania, were almost wholly destroyed, with serious loss of life. The eruption of Etna had subsided materially.

**IMPROVED ANCHOR.**

The engraving represents an improved anchor recently patented by Messrs. Spedden & Stafford, of Astoria, Oregon. It consists in a single fluke pivoted in a frame and provided with cam-shaped tripping arms at its base. The frame or shank serves both as a shank and stock, and it has no projecting arms to entangle the cable or chains so as to foul it, and its action is rendered positive by the action of the trip arms.



A Novel Anchor.

**Solution for Electro-Plating with Copper.**

The following recipe is for a solution for electro-coppering iron, lead, zinc, pewter, etc.: Weigh out, sulphate of copper, one drachm; tartaric acid, two drachms; caustic potash (in sticks), two drachms. Dissolve the sulphate of copper in about half a tumblerful of water. Also dissolve a small quantity of washing soda (about 2 drachms) in warm water, and add the soda solution to the copper solution.

Just enough should be added to throw down all the copper in the form of a green precipitate—basic carbonate of copper. This precipitate has now to be separated from the fluid, which is a solution of sulphate of soda. The quickest way to effect the separation is by filtration, in which a piece of blotting paper, folded twice and adjusted within a funnel, may replace the usual filter paper. The *Electrician* says that if time be no object, the precipitate may be allowed to subside, and the clear solution afterward poured off. In either case the precipitate should be washed with clear water in order to remove the last portions of the soda solution. Now dissolve the tartaric acid in a small quantity of warm water; get the moist copper precipitate into a tumbler, and pour the tartaric acid solution upon it. Effervescence will take place. Wait until all the gas—carbonic acid—is evolved; then put the sticks of caustic potash into the tumbler, and add sufficient water to make up at least half a tumblerful—one gill—of solution. The potash dissolves the copper precipitate, the fluid becoming of a beautiful blue color, without any sediment.

**Ancient Intercourse with China.**

The Chinese Ambassador, Li-Fang-pao, at Berlin, says that from the Chinese inscription on one of the vases found by Dr. Schliemann on Trojan soil, it is proved that there was traffic between China and European boundaries about twelve hundred years before Christ. The gauze linen found by Dr. Schliemann in the vase was made in China. Li-Fang-pao contends that the Hyperboreans were Chinamen.



## Correspondence.

## The Cause of Consumption.

To the Editor of the Scientific American:

In your editorial of May 31 upon my views of the cause of consumption you say: "Regular physicians will be apt to say" I have "mistaken a condition for a cause." That such a mistake might be made upon so complicated a subject is no doubt a natural inference, and I do not write to complain of it—far from that—but to call attention to a few facts which show how little chance there is to make a mistake in this important matter.

I cannot see, for instance, how it is possible to mistake a condition for a cause in consumption any more than in Bright's disease, with that feature of either disease that is identical in both; that is to say, it is difficult to see how the loss of albumen from the blood through the kidneys, in Bright's disease, can be considered the cause of the disease, while an equal or greater loss of albumen from the blood through the lungs, in consumption, should be held to be only a condition of that disease. The mistake would certainly be in divorcing the two losses in that way, and say that the waste of identically the same element from the blood meant one thing in the one disease and an entirely different thing in the other.

The entire medical profession of all schools, and without exception, stands committed to the teaching that a discharge of albumen from the kidneys is the cause and the only cause of Bright's disease, and of all that follows in those cases up to and including death; also, that it is one of the most fatal of all diseased conditions. And the fact that all of the albumen so discharged is a direct waste or loss of just so much of it from the blood is proved by the following from Carpenter's "Physiology," page 189, where, in speaking of Bright's disease, he says:

"According to Andral the diminution in the amount of albumen in the serum is exactly proportional to the quantity contained in the urine."

Language could not be more definite and positive than that. There never was a case of Bright's disease without the discharges from the kidneys containing albumen. That constitutes the disease. It is the first, the last, and the only symptom, with barely one minor exception, viz., fibrinous casts of the uriniferous tubules, by which the disease is known or can be recognized with certainty to exist during the lifetime of the patient. All other manifestations of the disease are common to several other diseases.

With consumption also the very first departure from health is a discharge of albumen through or from some one or more of the organs lined with a mucous membrane, more generally of course from the air passages; still many cases are commenced by a waste of albumen through and in consequence of chronic irritations and abrasions of the mucous membrane of the stomach, of the bowels, or of the genital organs of females, until the system is exhausted to a certain extent, when in many of these cases the disease will leave those parts and be transferred to the lungs, or be driven to them by wrong treatment, there to complete its final work. The waste of albumen continues, too, in all cases of consumption, and generally in an increasing quantity, to the close of life; so it is the first and among the last symptoms of the disease, but by no means the only certain indication of it, as in Bright's disease. Indeed, consumption has ever, hitherto, been recognized solely by other symptoms and appearances, and the fact of the loss of albumen has never before been taken into consideration as a constant attendant of the disease, much less has it ever before been even suspected of being the true and only cause of it. But there never would have been and never could be a case of consumption but for the waste of albumen, any more than there could be a case of Bright's disease without that.

And that the appearance of albumen in the discharges in all these cases is a loss or waste of just so much of it from the blood, the same as in Bright's disease, is a self-evident fact, for there is no other possible source from which it can be drawn but from the blood.

Again, never a case of consumption occurred without the blood becoming too watery long before tubercles began to organize, and getting more and more watery as the case went on and the waste of albumen increased; and nothing causes this too watery condition of the blood but the loss of albumen therefrom, excepting with those in poverty, who are compelled to live on too watery food, or that which does not contain sufficient albumen. And here it may as well be said that nothing is food for man that does not contain considerable albumen; and that which contains the most of it, other things being equal, is by far the best.

To recapitulate the main facts in this subject, then, so that any intelligent mind will be able to grasp it as a whole: The first departure from health in consumption is marked by a waste of albumen, always from the blood, and the increase in severity of any and all symptoms of the disease is marked by an increasing waste of albumen; the watery condition of the blood is solely due to such waste, and the blood becomes more watery as the waste becomes greater, because of the increasing relative excess of water left in the bloodvessels by it; this excess of water causes the night sweats and dropsy, which get worse as the loss of albumen increases; the blood corpuscles left in excess are decolorized by circulating in the too watery serum and become the so-called tuberculous corpuscles, which also increase in numbers as said loss progresses; the excess of fatty matters causes the fatty livers,

etc.; the excess of fibrin causes the adhesions of the pleura, which become more and more extended as the cause of all advances; the same general fact holds in regard to the excess of salts producing their characteristic troubles, which increase with all else; and finally, the characteristic emaciation of consumption keeps exact pace with the waste of albumen; when this progresses slowly that progresses slowly, when this goes on rapidly that goes on rapidly, for the simple reason that the muscles are being robbed of a portion of their only food, and must shrivel in the exact ratio that that is taken from them.

By such a presentation of the facts of the case I trust all will now be enabled to see how almost impossible it is to make any great mistake upon any point in this subject; also that every part of it is so intimately and inseparably connected with every other part, that it must be considered as a whole, if we would deal intelligently with it. And this leads me to call attention, in conclusion, to the fact that, as you inferred at the close of your editorial, the treatment of consumption must be radically changed in almost all respects to correspond with the real cause, and with this great chain of events as they naturally occur in the disease, or there is no hope of the profession ever doing any more in the future than it has in the past in mastering this greatest of all the scourges of mankind.

ROLLIN R. GREGG, M.D.

Buffalo, N. Y., June 10, 1879.

## ENGINEERING INVENTIONS.

Mr. W. H. Maple, of Chariton, Iowa, has recently patented an improved car coupler, which employs a combined link and pin. It is certainly very simple, and it appears to be a safe and practical device. It is operated from the side of the car, thereby avoiding the accidents common to the old link and pin coupling.

An improvement in drill jars, consisting in forming the links with rounded outer and inner surfaces and cylindrical anvils or striking heads, arranged inside at the ends of the links to receive the impact when the drilling tool is lifted, has been patented by Mr. J. E. Hughes, of Barnhart's Mills, Pa.

An improvement in hand and horse power fire engines has been patented by Mr. A. S. Walbridge, of Mystic, Quebec, Canada. Three or more pumps are arranged radially around a vertical shaft, and operated by a single crank. The shaft is fitted with a hub for carrying sweeps, so that it may be driven by hand or horse power.

An improved centrifugal ore pulverizer and separator has been patented by Alexander Goodhart, of Carlisle, Pa. The invention relates to the construction of a cylinder, into which the ore matter is first received, and in which it receives a preliminary pulverizing. This cylinder is surrounded by another cylinder, that revolves in the opposite direction, and completes the pulverizing process.

Mr. Sylvanus B. Nickum, of Jalapa, Ind., has patented an improved railroad switch, which may be operated from the locomotive or from the rear car of the train. The switch rails are operated by a lever, which is pivoted to one of the ties, and is engaged by a pin on the locomotive or car, the pin being arranged so that it may be dropped down into position to engage the lever or raised up out of the way.

Henry Reese, of Baltimore, Md. (not Ruse, as given in a recent issue), has patented in this country, a railway cross-tie, of wrought iron, to which the rails are fastened by means of a permanent lug and removable clamp at each end of each tie. Both lugs face toward the same end of the tie, and the alternate ties are reversed end for end, so that the permanent lugs alternate on opposite sides of the base flanges of the rails. The movable clamp is held to its place by a simple form of spring, which takes up all wear and keeps the fastening tight and rigid. Patents are pending for the same invention in several European countries.

## The Steam Engine of the Future.\*

In the form of a pamphlet the well known author of many valuable works on the steam engine has now given forth some admirable suggestions, and sensible provisions, as to the future of the wondrous machine. We shall at present content ourselves with allowing Mr. Bourne to speak for himself on this pregnant subject. He observes that "the benefit of working steam engines expansively is well known to engineers, as also the necessity of employing a steam jacket in engines so worked, to obtain the full benefit of the expansive principle. It is not generally known, but is nevertheless the fact, that in high speed engines there is a further benefit arising from the inability of the cylinder to become sensibly heated and cooled at each stroke, from the shortness of the time given for that process, and in such engines the cylinder approaches to the condition of a non-conductor, which is known to be favorable to the economical generation of power. Then, in the case of all high pressure engines, it is easy to see that a considerable pressure must be more beneficial than a lower pressure. To raise a given quantity of water into steam takes just the same quantity of heat, whether the evaporation is effected at the pressure of the atmosphere or at six or eight times that pressure. But at the low pressure the steam will not generate any power, whereas at the high pressure it will generate much power. A very high pressure of steam, however, is inconvenient, as

it involves a correspondingly strong and heavy boiler, an extra strong and heavy engine, and separate expansion gear, which is not compensated by the small amount of increased economy obtained from excessive pressure. I have found a pressure of about eight atmospheres to be, on the whole, the most eligible that can be adopted.

"Supposing a good and cheap small engine to be available—an engine that will be strong, simple, safe, light, noiseless, and economical in fuel—not only would all its industrial applications be extended, but it would find a new and wide sphere of usefulness in ministering to domestic wants, one of the most widely pervading of which is the want of a simple motive power. In American hotels steam engines have long been employed for brushing boots and cleaning knives. They are the docile and inexpensive Helots of the age, and the domestic production of the electric light is a new and important sphere for their energies. But besides these functions, a domestic engine may be employed in roasting meat, driving washing machines and mangles, driving sewing machines, in brushing hair, in preparing aerated waters, and in the country for pumping, for sawing wood, and for performing many other laborious operations. A steam engine may be made to cool houses in summer and to warm them in winter, to maintain fountains in conservatories, to work punkas, to produce ice, and to create and maintain a vacuum in safes for the preservation of meat. For such purposes the engine must obviously be of the simplest, most compact, and most inexpensive character, and should be attached to the boiler, so that the whole may be lifted in a piece, like a hall stove. The boiler should be provided with a self acting feed of water, and the fuel should be gas, which has only to be lighted to enable the engine to be put into operation. Gas companies will find ample compensation for the loss of their lighting function in the creation of a new heating function, which will become larger and more remunerative than the lighting has ever been. Instead of extracting from the coal only the illuminating gases, the whole fuel should be turned into combustible gas by the aid of superheated steam, and all the fires of houses could be maintained by this cheap gas burning in jets amid pumice, which it would keep red hot. There would then be neither dust from grates nor smoke from chimneys, and the gas-works would supply the fuel that is necessary for the generation of the electric light.

"I cannot pretend in this brief notice to enumerate all the improvements which the steam engine of the future should comprehend; but one essential quality is, that the boiler shall not be liable to internal incrustation, and that there shall be abundant facilities for easily cleaning it out. Most waters contain a certain proportion of lime, which is precipitated by boiling, and in tea-kettles this lime forms an internal crust, which is termed 'rock.' Such incrustation hinders the transmission of heat through the metal of a boiler, and is injurious in various ways. But there are known means of preventing its formation, and in the 'steam engine of the future,' it is an indispensable feature that these means shall be embodied.

"The application of the steam engine to the propulsion of carriages, omnibuses, and cabs, is now only hindered by its too heavy weight and too high cost. Asphalt pavements, which are objectionable for horses, afford for steam carriages a surface as eligible for easy traction as a railway, and without any countervailing fault. All wheeled vehicles, whether required to travel at a high or a low speed, will be propelled by steam instead of horses as soon as the steam engine is made sufficiently light and sufficiently cheap to warrant the substitution. Life boats, instead of being open boats propelled by a number of men, should be decked boats propelled by a steam engine, and managed by only two men, one to steer the boat and the other to attend to the engine. Such boats should be propelled by a water jet which will always act, whatever may be the roughness of the sea, and whether the stern of the boat is in or out of the water. The use of the steam engine for irrigation in connection with the centrifugal pump is an application of which the sphere is limited only by the cost and the deficient portability of the apparatus. To render the class of small engines so much more portable, so much more simple, and so much less costly as to remove the existing impediments to their use, may certainly be accounted one of the most important problems of the present time, and I trust it is not presumptuous to hope that the cursory hints here given may accelerate the desired solution.

## Comparative Longevity.

Herr Max Waldstein, of the Statistical Department at Vienna, says, in a recently published pamphlet, that the number of people in Europe who are upward of 90 years old is 12,831, of whom 60,203 are women. Of those who are over 100 years of age, there are 241 women and 161 men in Italy, 220 women and 183 men in Austria, and 526 women and 534 men in Hungary. There are in Austria 1,508,350 persons over 60 years of age, comprising 7.5 per cent of the whole population. It is found that the percentage of old people is much higher among the Germans than among the Slavs. In the German provinces of Upper Austria and Salzburg it is 11.5, while in Galicia it is only 4. In Hungary there are more old men than old women, which is explained by the fact that the excess of women over men is less in Hungary than in other countries. According to Herr Waldstein there are in Austria 100 women and 86 men who are 100 years old, 41 women and 37 men who are 101, and 98 women and 60 men who are upwards of 101 years of age.

\* "The Steam Engine of the Future, and the Future of the Steam Engine." By John Bourne, C.E. London: John Bourne & Co., 66 Mark-lane. 1879.—From *Foreman Engineer and Draughtsman*.



## AN OLD CONCERN RE-ESTABLISHED.

Horace Waters & Son, dealers in musical instruments in this city, made an assignment not long ago to secure their creditors. Mr. Waters, Sr., after thirty years' experience, hopes, by enterprise, economy, and fair dealing, to re-establish his business and to retain his old customers. To this end, he has opened a store at No. 40 East 14th St., and acts as agent for a number of leading musical instrument manufacturers.

## Business and Personal.

The Charge for Insertion under this head is One Dollar a line for each insertion; about eight words to a line. Advertisements must be received at publication office as early as Thursday morning to appear in next issue.

There is no delay, no firing up, no ashes, no extra insurance, and no coal bills, for manufacturers using the Backus Water Motor. It is the most economical power known for driving turning lathes, scroll saws, grinders, printing presses, sewing machines, etc. Four horse power at 40 pounds pressure. It is noiseless, neat, compact, steady, and, above all, very cheap. Will work at any pressure above 15 pounds. Send for circular, addressing the manufacturers, The Backus Water Motor Company, Newark, N. J.

The best results are obtained by the Imp. Eureka Turbine Wheel and Barber's Pat. Pulverizing Mills. Send for descriptive pamphlets to Barber & Son, Allentown, Pa.

Catechism of the Locomotive, 625 pages, 250 engravings. The most accurate, complete, and easily understood book on the Locomotive. Price \$2.50. Send for a catalogue of railroad books. The Railroad Gazette, 73 Broadway, New York.

Best Turkey Emery in bins, kegs, and cases. Special rates for large quantities. Greene, Tweed & Co., 15 Park Place, New York.

Solid and Opening Die Bolt Cutters, Screw Plates, and Taps. The Pratt & Whitney Co., Hartford, Conn.

Wanted—A 3d hand Stationary Engine, about 18 to 20 H.P. J. Davis, Limestoneville, Montour Co., Pa.

Wanted—Engineers and others to sell Barr's "Combustion of Coal." \$5 a day made after working hours. Address John Bros., Indianapolis, Ind.

The advertisement of the Aultman & Taylor Company, which attracted so much attention last week, will appear again in the next issue.

Bunnell's Dynamo-Electric Machine for Gold, Silver, Copper, and Nickel Plating. An improved, reliable, and powerful machine, for \$75. Bunnell, Electrician, 112 Liberty St., New York.

Makers of Engines, Lathes, Jig Saws, etc., for amateur use, send circulars to 310 York Ave., Phila., Pa.

Pattern Makers can get Metallic Pattern Letters to letter patterns, of H. W. Knight, Seneca Falls, N. Y.

For Sale.—One Corlies Engine, in first-class order, having been used but little; cylinder 30 in. diameter, 24 in. stroke. Kelly & Ludwig, 725 Filbert St., Philadelphia, Pa.

Wright's Patent Steam Engine, with automatic cut-off. The best engine made. For prices, address William Wright, Manufacturer, Newburgh, N. Y.

Eubler Belting, Packing, Hose, and all kinds of manufacturers' supplies. Greene, Tweed & Co., 15 Park Pl., N. Y.

The address of John Byrne, maker of the 4½ in. telescope, with which the companion of Sirius was recently seen, is 314 East 21st St., New York City.

Sawyer's Own Book, Illustrated. Over 200 pages of valuable information. How to straighten saws, etc. Sent free by mail to any part of the world. Send your full address to Emerson, Smith & Co., Beaver Falls, Pa.

For Sale or Royalty.—Goodwin's Music Leaf Turner. Patented March 4, 1879. No. 212,846. Address O. H. Goodwin, P. O., San Francisco, Cal.

The H. W. Johns Mfg. Co., 87 Maiden Lane, New York, are sole manufacturers of the Genuine Asbestos Liquid Paints, Boiler Coverings, Fireproof Coatings, etc.

Gears.—All kinds and sizes. New list. Light machine work, models, etc. Geo. R. Grant, 95 Beverly St., Boston, Mass.

Slate, Barrel, Keg, and Hoghead Machinery a specialty, by E. & B. Holmes, Buffalo, N. Y.

Improved Blind Staples. B. C. Davis, Binghamton, N. Y.

For Solid Wrought Iron Beams, etc., see advertisement. Address Union Iron Mills, Pittsburgh, Pa., for lithograph, etc.

H. Prentiss & Co., 14 Dey St., New York, Manufs. Taps, Dies, Screw Plates, Reamers, etc. Send for list.

For Screw Cutting Engine Lathes of 14, 15, 18, and 24 in. Swing. Address Star Tool Co., Providence, R. I.

The Horton Lathe Chucks; prices reduced 30 per cent. Address The E. Horton & Son Co., Windsor Locks, Conn.

Lincoln's Milling Machines; 17 and 30 in. Screw Lathes. Phoenix Iron Works, Hartford, Conn.

Boilers ready for shipment. For a good Boiler send to Hiles & Jones, Wilmington, Del.

A Cupola works best with forced blast from a Baker Blower. Wilbraham Bros., 2,318 Frankford Ave., Phila.

Presses, Dies, and Tools for working Sheet Metal, etc. Fruit & other can tools. Hiles & Williams, B'klyn, N. Y.

Linen Hose.—Sizes: 1½ in., 2 in., 2½ in., 3 in., 3½ in., 4 in. per foot, subject to large discount. For price lists of all sizes, also rubber lined linen hose, address Eureka Fire Hose Company, No. 13 Barclay St., New York.

Nickel Plating.—A white deposit guaranteed by using our material. Condit, Hanson & Van Winkle, Newark, N. J.

The Lathes, Planers, Drills, and other Tools, new and second-hand, of the Wood & Light Machine Company, Worcester, are being sold out very low by the George Place Machinery Agency, 121 Chambers St., New York.

Linen Hose.—All sizes, with or without couplers, in any quantity. Greene, Tweed & Co., 15 Park Pl., N. Y.

Hydraulic Presses and Jacks, new and second hand. Lathes and Machinery for Polishing and Buffing Metals. E. Lyon & Co., 670 Grand St., N. Y.

Band Saws a specialty. F. H. Clement, Rochester, N. Y.

American Fruit Drier Mfg. Co., Chambersburg, Pa.

Sheet Metal Presses, Ferracuts Co., Bridgeton, N. J.

Eclipse Portable Engine. See illustrated adv., p. 414.

Eagle Anvils, 9 cents per pound. Fully warranted.

Pulverizing Mills for all hard substances and grinding purposes. Walker Bros. & Co., 2nd & Wood St., Phila., Pa.

Split Pulleys at low prices, and of same strength and appearance as Whole Pulleys. Yocom & Son's Shafting Works, Drinker St., Philadelphia, Pa.

Acme Lathes.—Swing, 7 in.; turn, 19 in. long; back geared; screw cutting. Send 3 cent stamp for circular and price, to W. Donaldson, southwest corner Smith and Augusta, Cincinnati, Ohio.

The Improved Hydraulic Jacks, Punches, and Tube Expanders. B. Dodgeon, 24 Columbia St., New York.

The best Friction Clutch Pulley and Friction Hoisting Machinery in the world, to be seen with power applied, 55 and 91 Liberty St., New York. D. Frisbie & Co., New Haven, Conn.

For Sale.—9 pieces 2 7-16 turned shaft, 11 feet long; coupled; good as new. Frisbie & Co., New Haven, Ct.

Diamond Drills, J. Dickinson, 64 Nassau St., N. Y.

Hydraulic Cylinders, Wheels, and Pinions, Machinery Castings; all kinds; strong and durable; and easily worked. Tensile strength not less than 65,000 lbs. to square in. Pittsburgh Steel Casting Co., Pittsburgh, Pa.

Wood-working Machinery, Waymouth Lathes. Specialty, Wardwell Patent Saw Bench; it has no equal. Improved Patent Planers; Elevators; Dowel Machines. Rollstone Machine Company, Fitchburg, Mass.

Forsyth & Co., Manchester, N. H., and 213 Centre St., New York. Specialties.—Bolt Forging Machines, Power Hammers, Combined Hand Fire Engines and Hose Carriages, new and 2d hand machinery. Send stamp for illustrated catalogues, stating just what you want.

The new "Otto" Silent Gas Engine is simple in construction, easy of management, and the cheapest motor known for intermittent work. Schleicher, Schuman & Co., Philadelphia, Pa.

Dead Pulleys that stop the running of loose pulleys and their belts, controlled from any point. Send for catalogue. Taper Sleeve Pulley Works, Erie, Pa.

The Twiss Automatic Engine; Also Vertical and Yacht Engines. N. W. Twiss New Haven, Conn.

## NEW BOOKS AND PUBLICATIONS.

CAPTAIN LILL'S GRAPHICAL METHOD. By Lieutenant William H. Bixby, U. S. A. West Point, N. Y.: printed for author. Paper, pp. 16. Price 20 cents.

This graphical method for finding the real roots of numerical equations of any degree, if containing but one variable, was first exhibited by Captain Lill, of the Austrian service, in 1867. Lieutenant Bixby presents it for the first time in English, and adds a demonstration of its correctness.

## Notes &amp; Queries.

## HINTS TO CORRESPONDENTS.

No attention will be paid to communications unless accompanied with the full name and address of the writer.

Names and addresses of correspondents will not be given to inquirers.

We renew our request that correspondents, in referring to former answers or articles, will be kind enough to name the date of the paper and the page, or the number of the question.

Correspondents whose inquiries do not appear after a reasonable time should repeat them.

Persons desiring special information which is purely of a personal character, and not of general interest, should remit from \$1 to \$5, according to the subject, as we cannot be expected to spend time and labor to obtain such information without remuneration.

Any numbers of the SCIENTIFIC AMERICAN SUPPLEMENT referred to in these columns may be had at this office. Price 10 cents each.

(1) J. B. T. asks: Does the horseshoe magnet lose its power by use, and where it is used in frequent contact with the steel parts of a machine will it so magnetize those parts as to render the magnet useless? A. A magnet by constant use is enfeebled, but it may be readily recharged.

(2) B. B. B. writes: Vol. XL, No. 22, p. 348, "Answers to Correspondents" (17), to R. J. F. Are you quite sure? The resistance increases with the square of the velocity, and a bullet with a heavy charge of powder may be flattened by firing it vertically down against the surface of a pall of water. A. The penetrating force increases as the square of the velocity; the resistance is not so increased, but is determined by the character of the resisting material. "The measure of the penetrating force is stated by all authorities to be the weight of the shot, multiplied by the square of the velocity at the moment of impact." Now as the velocity is greatest at the instant the projectile leaves the gun, the nearer the resisting material the deeper it must necessarily be penetrated.

(3) J. G. B. writes (1) whether it is not better to use a stripping solution in nickel plating; if so, should it not be made stronger than the regular plating solution? A. Good nickel platers consider such a solution unnecessary. 2. Am I right in using the carbon battery in nickel plating? A. Carbon (bichromate) batteries are often used, but the best plating is done with a battery of lower electro-motive force—such as that of Smee. 3. I have tried to dissolve platinum with 1 part nitric and 3 parts muriatic acids without success; please tell me why. A. Use more hydrochloric acid (1 of nitric to 3 of hydrochloric), and apply a moderate heat, decant the solution, and add fresh acid until all (if the metal is free from osmium and iridium) is dissolved. Platinum does not dissolve very rapidly. 4. How is bright gilding done? A. Without knowing something as to the surface you propose to gild, we cannot give the required information.

(4) E. N. asks (1) how to proportion a safety valve. A. See rule for calculating safety valves in answer (29), p. 267, vol. 40, SCIENTIFIC AMERICAN. 2. How to calculate the strength of boilers? A. We must refer you to rules published by Haswell, Clark, Molesworth, and other authors. A note to cover the whole question would be too long for our "Notes and Queries."

(5) L. B. asks how to preserve insects. A. Laboulbère recommends plunging the insects, in the fresh state, into alcohol which has been saturated by digestion with arsenious acid (1½ pint will take up about

14 troy grains of arsenic). The living insect put into this preparation absorbs about 0.008 of its own weight. When soaked in this liquid and dried the specimens are safe from the ravages of moths, *anthrenus* or *dermestus*. This treatment does not affect the color of blue, green, or red beetles, if dried after soaking for 13 to 34 hours. *Hemiptera* and *orthoptera* can be treated in the same way; also the nests, cocoons, and chrysalides of insects.

(6) M. M. A. writes: In discussing the answer to question No. 30, of May 17, 1879, page 316, a few inquirers could not reconcile your answer with the principle that the "pressure of water increases as the depth." Would you kindly clear up the difficulty? A. A pipe to hold three times the quantity must have three times the area, or be 10⁴ inches diameter nearly; now as strength of a pipe is inversely as the diameter, it is evident that if the strength were but just sufficient for a pipe 6 inches diameter, it would be entirely too weak for one 10⁴ in diameter.

(7) G. W. B. asks for instructions as to the proper kind, size, shape, etc., of furnace, that will be inexpensive to build, suitable for the economic melting of zinc in say fifty or hundred lb. lots. A. An ordinary cast iron melting pot, of sufficient capacity, seated on brickwork over a shallow furnace with a moderate draught, answers very well.

(8) G. H. H.—You may consult Britton's "Treatise on Dry Rot, and the Means of Preserving Timber from Destruction by Sea Worms, Beetles, Ants, etc."

(9) "Hercules" asks for an explanation of the difference between a "fine" and a "tubular" boiler. A. Formerly the distinction was between a welded tube drawn through dies and flues of so large a diameter that they were riveted together; but within the past 4 or 5 years the tube makers have enlarged their machinery, so that now welded and drawn tubes (or flues) are made up to 18 or 20 inches diameter, so that the line of distinction between the tube and flue is in a measure wiped out; probably in engineering language, flues of 6 inches diameter or less would be termed tubes, and larger diameters, flues.

(10) J. G. D. asks: 1. Suppose we place a gun perfectly level, 3 feet from the ground, and have force enough behind the ball to cause it to go 100 yards over a level plane. The question is, will the ball rise above the starting point, or can a ball be forced that distance without its rising above the level of the gun? A. It will not rise higher than the starting point. 2. Suppose we have the gun in the above position, and so arranged that the same spring that causes the first ball to start will also cause a second ball to fall from the same point to the ground. The question is, which ball will strike the ground first? A. If we understand your question, they will both fall in the same time.

(11) B. E. H. asks for the right ascension and declination of Mercury, Venus, Mars, Jupiter, and Saturn, for the 13th day of June, 1880. A. The following are the positions of the planets named at the time of transit at Washington, on the 13th of June, 1880, Washington mean time:

Mercury	...R. A.	6h 6m 07.0s	Dec. N. 25° 7' 28.7"
Venus	...	8h 15m 57.1s	21° 14' 50.1"
Mars	...	9h 13m 24.2s	23° 58' 8.7"
Jupiter	...	7h 35m 13.1s	21° 17' 30.0"
Saturn	...	9h 37m 56.2s	13° 34' 3.9"

2. How is right ascension and declination of the planets found for the past or future if it is known for any one time? A. That all the planets move in elliptical orbits is Kepler's first law, and that a line drawn between the centers of sun and planet sweeps over equal spaces in equal times is his second law, and answers your second question; but a complete elucidation of this would occupy too much of our space.

(12) D. F. writes: I read in one of your back numbers that if 14 grains of bichromate of potassium were dissolved in one ounce of gelatin and poured upon a ground glass plate, and dried in the dark, by placing a negative over the dried bichromate surface and exposing it to the rays of sunshine for a few minutes, then ink it over with printer's ink and place it in a water bath, after which the water will cause all parts that the light did not come in contact with to float away, leaving the image standing in bold relief, from which any number of prints could be taken by merely using it as a dye, upon plain paper. I did just as the paper said, and made a sad failure. So that you may thoroughly understand me, I have given you the process in full. Can you give me further information? A. Like many others you have misinterpreted the necessarily brief instructions, and have attempted the process without informing yourself as to its rationale. You will find much useful information respecting photo-printing processes in Vogel's "Chemistry of Light and Photography," and in the back numbers of the SCIENTIFIC AMERICAN.


(13) C. W. H. asks: How are postage stamps printed: what kind of ink is used? A. They are printed in sheets of 200 each in heavy presses, with fine copper plate inks. The precise composition of these inks is not made public by the government printers or bank note companies. The colors are: blue 1 cent stamp, ultramarine-sulphide of sodium and iron and silicate of alumina; red 2 cent stamp—vermillion-sulphide of mercury; red 3 cent stamp—carmine; green 3 cent—Prussian blue with chrome yellow.

(14) S. A. J. asks (1) if there is any way to clean or keep clean the roof of the furnace of an upright tubular boiler where there are no hand holes. I have used locomotive and stationary boilers, but this is the first upright, and I am at a loss to keep it clean. A. You should have some small cleaning holes at the level of the crown of the furnace to clean and wash off the plate. 2. Also, where should the gauge cocks be? I have noticed in short boilers they are nearer the furnace than long ones: is there a rule for them? A. There is no rule; they should be low enough to leave sufficient steam room.

(15) J. T. B. asks: 1. How far up from the entrance of flue into a chimney ought a steam jet be introduced to increase draught? A. It depends upon

the height of chimney and pressure of the escape steam; the jet should be able to drive the whole column of air in the chimney at a rapid velocity. 2. In what form should jet be fixed in chimney? A. A cone with the end of opening bell shaped. 3. Will it injure materially a brick stack? A. No, if the temperature of gases in chimney is sufficient to prevent condensation.

(16) C. O. M. asks how to make a small furnace suitable for melting from 10 to 25 lb. of cast iron; what to use to produce sufficient blast. A. The accompanying figures will give a very good idea of a small cupola for melting iron. Fig. 1 being a perspective view, and Fig. 2 a section of the cupola. The body is made of heavy sheet iron, lined with fire brick, and provided with trunnions by which it is supported on cross bars in a frame composed of two iron plates about two feet square, separated by four 4½ foot columns of 3 inch gas pipe, the whole being fastened together by four long bolts which pass through both plates and through the columns. The upper plate has a large opening and a flange or collar for receiving the base of the chimney. The cupola has openings on opposite sides to receive the blast nozzles or tuyeres, and a tap hole in front. It should be about 3 feet high, and 14 inches internal diameter. The base of the chimney should have a door through which to charge the cupola. The blast may be supplied with a large bellows, but a small fan blower will answer much better. For the quantity of iron mentioned a cupola two thirds the size given would answer.



(17) C. E. S. asks: What are the ingredients used in making the copper ruby stain for ornamenting the common glass petroleum lamp cisterns and cheap vases? A. Use a soft (lead) glass containing about 3 per cent of protoxide of copper. Stir the pot occasionally with a stick of green wood, or add a little tartar, to prevent higher oxidation of the copper, which would then produce a greenish glass. The proper color appears only upon annealing.

(18) N. W. asks: How can I cut a round hole in a pane of glass and save the pane—do not care about saving the inside; want to cut a hole 6 inches in diameter; have tried a diamond without success? A. Use a copper tube of the size of the required hole; revolve it in contact with the glass, and supply it with emery and water.

(19) G. P. asks: 1. Can eggs and pears be preserved by being kept in rarefied air or in air-tight jars? A. No, not practically. 2. Can eggs preserved with lime be changed so as not to show it? A. Dip them momentarily in acetic acid, then in cold water, and let dry in the air. 3. What is the most successful way to preserve apples and pears? A. Either by thorough desiccation, or in sugar sirup or glycerine from which the air has been expelled by boiling.

(20) R. D. K. asks: 1. What is the specific heat; specific gravity (in liquid and gaseous state respectively); calorific of fluidity or latent heat; volume at boiling point under pressure of atmosphere; point of congelation; point of liquefaction under given pressure; and atomic weight of each of the following substances, stating unit—Chloride of methyl, ether, nitrous sulphurous oxide, ethyl chloride, methyl bromide, aldehyde, methyl forminate, ethyl bromide, methyl iodide, carbon disulphide, bromine, acetic ether, hydrogen, and ammonia? A. Specific heat—1.2996, nitrous oxide 0.9447, sulphurous oxide 0.9444, ethyl chloride 0.6006, ethyl bromide 0.7658, carbon disulphide 0.4122, bromine 0.9040, acetic ether 1.2194, hydrogen 0.2354, ammonia 0.3096. Specific gravity—ethyl ether +30°, 0.7113; 0°, 0.736. Nitrous oxide 1.505, sulphurous oxide 2.21, ethyl chloride 0.874, methyl bromide 1.66, aldehyde 0.807, ethyl bromide 1.47, methyl iodide 2.22, carbon disulphide 1.27, bromine (liquid) 2.976 (vapor) 5.54, hydrogen 0.0698, ammonia 0.769. Latent heat (steam = 1)—methyl formate 0.919, methyl iodide 0.066, carbon disulphide 0.162, bromine 0.093, acetic ether 0.173. For other data required consult "Constants of Nature," published by the Smithsonian Institution, Washington.

(21) J. B. writes: My house is at the bottom of a hill; after a heavy rain the water bursts in through cellar walls and bottom. How can I prevent it? Would cement answer the purpose? The house is too near the line of another's land to admit of digging a drain. A. Doubtful if cementing would be effective; better carry a drain below the cellar bottom.

(22) F. C. S. asks: 1. What is the power of an engine with (7) seven inch stroke, (6) six inch bore, running (150) one hundred and twenty revolutions per minute, with (60) sixty pounds of steam? A. See p. 367 (4), current volume of the SCIENTIFIC AMERICAN. 2. Is the steam pipe, 1½ inch (outside measure), large enough to supply steam for such an engine? A. Yes.

(23) J. J. S. asks how to determine, without a test, which will be the north or south pole of an electro-magnet. A. In electro-magnets, the north pole is always found at that end where the positive current enters a right handed helix. See forms of electro-magnets, with 51 engravings, in SUPPLEMENT, No. 182.

(24) J. R. asks how it is that dynamite is said to exert a greater force downward, and gunpowder upward when they explode? A. This is a misconception. Nitroglycerine (the explosive agent in dynamite) yields on exploding about 600 times its volume of gas; gunpowder but 300. This gas, suddenly liberated, must displace a portion of the atmosphere, which presses with a weight of about 9 tons upon each square yard of surface. To lift such a weight in the exceedingly short space of time occupied in the explosion of a charge of nitro-



glycerine (in the form of dynamite or otherwise) would require a force greater than to split a rock, and the rock yields. Gunpowder yields but 1-3 as much gas on exploding, and the complete combustion of its grains requires an appreciable amount of time. Nitroglycerine explodes all but instantaneously.

(35) W. B. asks: 1. Have Zamboni's dry piles ever been made of silver and zinc, and why do they not frequently make them so? A. We do not know that Zamboni's dry piles have ever been made of zinc and silver plates. Probably the reason why they are not made in this way is because an unnecessary amount of metal would be used; the silvered or tinned paper is found sufficient. 2. How long will they give an electrical current? A. They will give a feeble current which may last for years. 3. Can I do plating with Zamboni dry piles? A. No, the current is too slight. 4. Why must the gravity battery copper wire be inclosed in rubber or gutta percha? A. To prevent a short circuit.

(36) R. W. D. writes: I use the water pipes running through our house for a ground wire on a local telegraph wire. 1. Is there any danger of lightning doing any damage to the house? If so, what danger is there? A. If the wire connected with your water pipes is of sufficient size we think there is no danger; however, we advise the use of a lightning arrest. 2. How often should Calland batteries working a telegraph wire on a closed circuit and never cut out, be cleaned? A. The Calland battery, if properly cared for, will not need cleaning until the zinc is exhausted.

(37) R. W. R. asks for a recipe for making a good cheap macilage. A. Add British gum (dextrine) to a quantity of hot water until a sirupy liquid is obtained; then add a few drops of clove oil and cool for use. See also receipt on p. 347 (7), current volume.

(38) A. L. asks if there is anything that will stop (superfluous) hair from growing? A. See p. 75 (36), 91 (1), volume 39 of SCIENTIFIC AMERICAN.

(39) J. B. R. writes: I wish for a recipe for making water pens, the kind to dip in water in order to write. A. Moisten one of the soluble aniline blues or violets with thin gum water to form a paste, which will harden sufficiently on drying.

(40) E. E. G. asks: 1. Have paper wheels for cars ever been tried without a tire of iron or steel? A. No. 2. Are paper wheels now in use? A. Yes. 3. If so, where? A. On many railroads, including the Metropolitan Elevated in this city. 4. Have they iron tires? A. Yes, iron or steel. 5. How are the wheels fastened to the axle? A. By iron hubs or centers.

(41) R. H. & C. M. A.—We are offered an engine which has a cylinder 10 inches bore, 20 inch stroke, which we are recommended to use with 75 lb. steam as shown on gauge on boiler, and to make 150 revolutions per minute. By your rule for calculating horse power, this would seem to give us 80 1/4 horse power, which seems to us to be overrated. A. If the average pressure on the piston be 75 lb., your result is correct; but a deduction of say 15 per cent should be made for friction.

(42) R. D. B. asks: What length, thickness, and kind of charcoal ought to be used to produce an electric light on the plan as mentioned in SCIENTIFIC AMERICAN SUPPLEMENT, No. 162, page 2577, Fig. 39, equal to the light of two (4 foot) gas burners; and also how many batteries (Grenet style with carbon plates 4x9 inches) it would take to run said light? A. You will find the small pencils of carbon made expressly for electric lights, much better than charcoal. The pencil should be about 3-4 inch in diameter and 1/2 to 5/8 inch long. Eight cells of the size given should afford a fine light, but with the Grenet battery the light will be temporary.

(43) W. A. P. asks: 1. What is it that carriage makers use for setting the boxes in the hub with some kind of cement? A. The boxes are usually secured by wedges. We do not know of a cement that would answer the purpose. 2. What means will I use to get a fine finish on a buggy bed before varnishing: is it best to grind paint that I get in tin cans, before using? A. After applying the several coats of paint, including the priming, the rough coat—which is rubbed down—and the final coats giving the color, apply a coat of good rubbing varnish, and when it becomes thoroughly dry, smooth and polish it first with finely pulverized pumice stone and water, and second with rotten-stone and water. Finally apply a flowing coat of fine copal varnish.

(44) H. E. P. asks: Do dead centers ever occur in vertical, direct acting engines, or, in fact, any kind of a single engine, whether vertical or horizontal, with fly wheel or direct acting? A. The term dead center applies to all reciprocating engines; it is that exact point from which the direction of movement of the piston is changed, or that point where the pressure exerted upon the piston has no effect upon the rotating motion of the crank and shaft. The set of valves, point of cut off, or any other of the details of the arrangement of the engine, have nothing to do with it.

(45) T. G. asks (1) what the so-called fire kings use to rub on their skin to protect them from being burnt with the red hot iron they use in their performances. A. Water alone is commonly used, we believe. 2. What is the composition of aqua vitae or water of life? A. Aqua vitae—brandy, spirit, alcohol.

(46) C. W. asks: 1. What size and how much wire will I need in each spool to make an electrical gyroscope, as illustrated in SCIENTIFIC AMERICAN, No. 25, volume 39, and what length and thickness of core? A. The dimensions of the gyroscope referred to are as follows: Diameter of wheel, 3 1/2 inches; rim, 5-16 inch square; diameter of magnet cores, 1/4 inch; length of magnet cores, 1 inch; between centers of magnet cores, 1 1/2 inch; width of armature, 1/4 inch; thickness of armature, 3/4 inch; magnets wound with 6 layers No. 20 silk covered wire. 2. How much battery is necessary to work the same? A. 4 Bunsen cells in good order will run it, but 5 cells would be better. 3. Will ordinary zinc and copper cell do, of one quart capacity? A. Yes, but it will require from 12 to 15 of them. 4. Can I use a pair of Bell telephones for microphone experiments, by substituting a soft iron core in place of magnets? A. Yes. 5. How much battery will I need to work a line say of less than 500 yards in length? A. 2 or 3 Fuller cells.

(47) D. C. W. asks how to clean grave-stones without acid. A. Use stiff wire brushes of different sizes, and plenty of water.

(48) J. H. asks what are the uses of mica, and what is its value. A. Clear sheet mica is chiefly used for lights in the doors of stoves and furnaces, for lanterns, lamp chimneys, and transparencies, and in the manufacture of various toys, etc. Put up in pound packages it sells for from 40 cents to \$2.75 per pound, according to size and quality of the sheets. Untrimmed sheets are generally unmerchantable. It has been used successfully for roofing purposes.

MINERALS, ETC.—Specimens have been received from the following correspondents, and examined, with the results stated:

J. J. K.—1. Gypsum-sulphate of lime—used for manufacturing plaster of Paris and as a fertilizer. 2. The fragments are probably of meteoric origin.

#### COMMUNICATIONS RECEIVED.

On Patent System. By J. W.  
On the Hypothesis. By T. F.  
On Smoking Coffee for Consumption. By T. H. K.  
On Yellow Fever Manual and Squaring the Circle. By A. J. M. T. O. C.  
On the License System. By J. H.  
On Ventilation. By C. J. R.  
A Mechanic's Theory of the Solar System. By W. W.

#### [OFFICIAL.]

### INDEX OF INVENTIONS

FOR WHICH

Letters Patent of the United States were  
Granted in the Week Ending

May 27, 1879.

AND EACH BEARING THAT DATE.  
[Those marked (r) are renewed patents.]

Amalgamator, I. M. Phelps ..... 215,970  
Anker, W. Heyn ..... 215,744  
Bag fastener, A. Gleason ..... 215,736  
Bale tie, A. Gates ..... 215,900  
Bale tie, J. S. Kennedy ..... 215,735  
Baling press, J. Wohl ..... 215,854  
Bassin, wash, G. W. Deau ..... 215,801  
Bassin cleaner, wash, J. L. Hutchinson ..... 215,828  
Bed, spring, C. T. Segar ..... 215,981  
Bedstead, wardrobe, E. E. Everett ..... 215,727  
Billiard cue rest, T. Watson ..... 215,848  
Boot, C. H. Colburn ..... 215,794  
Boot and shoe heel plate, S. O. Swett ..... 215,830  
Boot and shoe toe stretcher, W. Nagle ..... 215,969  
Bottle cage, Williams & Greenwood ..... 215,832  
Bottle cork fastener, T. H. Shahan ..... 215,838  
Bracket, self-adjusting, W. A. L. Miller ..... 215,966  
Braid package clasp, D. & D. L. Goff (r) ..... 8,725  
Bran packer, J. E. Belt ..... 215,787  
Brick, etc., burner, J. & C. J. Foster ..... 215,904  
Brick burning kiln, E. G. Kemper ..... 215,906  
Brick machine, T. B. Craycroft ..... 215,886  
Buckle, Welden & Royce ..... 216,005  
Buckle, trace, A. McMullen ..... 215,820  
Butter and egg package, S. McHenry ..... 215,953  
Butter case, refrigerating, E. Slocum ..... 215,984  
Butter mould, W. S. Alexander ..... 215,856  
Butter package, W. W. Rodgers ..... 215,715  
Button and stud, C. B. Bloomer ..... 215,908  
Button card, J. Thornton ..... 215,902  
Calendar support, Pruyn & Hyatt ..... 215,914  
Candle, electric, J. B. Fuller ..... 215,738  
Carding machine cleaner, P. Hauser ..... 215,930  
Carpet fabric, W. Wallace ..... 215,999  
Carriage, child's, J. W. T. Hake ..... 215,927  
Caster, S. Vanstone ..... 215,966  
Casting hubs, mould for, V. Price ..... 215,772  
Casting ornamental figures, composition for, A. Klesole ..... 215,757  
Chain, driving, G. Vickers ..... 215,907  
Chair leg tenoner, F. F. Parker ..... 215,767  
Chair seat and back, Heywood & Watkins ..... 215,923  
Churn, W. L. Allegrey ..... 215,857  
Churn, M. H. Whitchel ..... 215,830  
Churn dasher, S. K. Warren ..... 216,000  
Cider mill, Marsh & Brandt ..... 215,990  
Cigar package, M. W. Prager ..... 215,973  
Clay grinder and mixer, J. M. Kennedy ..... 215,754  
Clocks, making wires and arbors of lock work for striking, F. A. Lane ..... 215,759  
Cooks, operating stop, P. Connolly ..... 215,883  
Coin assorter, A. S. Tyler ..... 215,846  
Coin package, W. V. Brigham ..... 215,788  
Copying press, W. L. Imlay ..... 215,820  
Cotton and hay press, J. K. Hawkins ..... 215,817  
Crochet needle, W. Ross ..... 215,979  
Cultivator, O. A. Crain ..... 215,835  
Cultivator, W. Jones ..... 215,861  
Curtain fixture, C. Cretors ..... 215,809  
Dental hand piece, H. O. Just ..... 215,832  
Desk, A. De Bary ..... 215,861  
Desulphurizer, A. M. Phelps ..... 215,971  
Diamonds, mounting, L. Taverdon ..... 215,840  
Dish washer, L. Warren ..... 216,001  
Distilling petroleum, process and apparatus for, J. L. Kirk ..... 215,735  
Distiller, wood, A. Knobloch ..... 215,940  
Door check, J. P. Elacott ..... 215,900  
Door sheave, rolling, J. H. Townsend ..... 215,993  
Doubling and winding machine, T. Unsworth ..... 215,995  
Easel, F. H. Frost ..... 215,731  
Eave trough, C. W. Hanneke ..... 215,749  
Egg packing box, I. Karel ..... 215,953  
Electric lighter, Colntepes & Bouchel ..... 215,722  
Electrical switch wires to binding posts, attaching, J. E. Hamilton ..... 215,917  
Electroplating, H. & H. W. Lovejoy et al (r) ..... 8,725  
Envelope, A. Christy ..... 215,798  
Envelope or double postal card, L. H. Rogers ..... 215,778  
Fan, automatic, F. Rothenbeck ..... 215,978  
Farm gate, W. Claypool ..... 215,893  
Farm gate, automatic, L. Ferguson ..... 215,814  
Farm gate support, S. G. Holyoke ..... 215,925  
Faucet joint, N. Spofford ..... 215,987  
Fence, J. W. Legore ..... 215,825  
Fence wires, machine for barbing, E. P. Peacock ..... 215,769  
Fencing, barb for wire, J. S. Crowell ..... 215,888  
Filter, E. W. Kidney ..... 215,968  
Firearm, G. W. Cilley ..... 215,731  
Fire escape, E. M. Ball ..... 215,718  
Flywheel, G. H. Corlies ..... 215,805

Fruit drier, McDowell & Ewell ..... 215,932  
Furnace for reducing oxide ores, C. M. Dupuy ..... 215,738  
Galvanic battery solution, C. A. Ehrenberg ..... 215,999  
Garbage cremating furnace, W. J. Morris ..... 215,907  
Gas, apparatus for the production of illuminating, C. Marchand ..... 215,940  
Gas works, jet exhaustor for, J. S. Connelly ..... 215,728  
Gate, J. A. Knickerbocker ..... 215,735  
Glass jar mould, J. N. Bodine ..... 215,869  
Glassware finisher, H. S. McKee ..... 215,761  
Glove, A. Harris ..... 215,732  
Grain conductor, J. F. Lenox ..... 215,760  
Grain drill fertilizer attachment, C. P. Bechtelle ..... 215,804  
Grain drill fertilizing attachment, D. F. Hall ..... 215,749  
Grain transfer, J. T. Hough ..... 215,818  
Gridiron, J. M. Adams ..... 215,711  
Guard finger, J. O. Brown ..... 215,759  
Hame fastener, H. N. Beam ..... 215,863  
Harrow, S. F. Reynolds ..... 215,975  
Harrow, sulky, G. W. Riley ..... 215,774  
Harvester rake, C. Liden (r) ..... 8,727  
Hats, ventilating, Waddell & Sample ..... 215,908  
Hay rack, C. Graham ..... 215,914  
Hay rake, horse, W. S. Archer ..... 215,784  
Hay rake, horse, W. C. Kingsnorth ..... 215,989  
Hay ricker and stacker, B. F. Jones ..... 215,900  
Hides, machine for ascertaining the area and weight of, D. T. Winter ..... 215,858  
Hoe, J. Gilmer ..... 215,735  
Holdback, vehicle, R. T. Barton ..... 215,714  
Hole puller, B. G. Chapman ..... 215,730  
Horse clothing, J. C. Simpson ..... 215,983  
Horse detach, J. Carr ..... 215,879  
Horse detach, R. H. Oakes ..... 215,981  
Horse detach, W. H. Potree ..... 215,965  
Horsehoe, Moebis & Landsneider ..... 215,764  
Horsehoe nail forger, L. S. Parre ..... 215,708  
Hose coupling, car, F. Woodbridge ..... 216,010  
Hub, vehicle wheel, J. I. Healey ..... 215,741  
Hydraulic elevator, H. Snowden ..... 215,985  
Hydro-pneumatic engine, C. Fisher ..... 215,902  
Incense coal, compound for, E. W. J. Lindesmith ..... 215,945  
Injector, Fulton & Proeger ..... 215,906  
Injector and ejector, J. H. Irwin ..... 215,821  
Instrument case and dental engine, combined, B. M. Wilkerson ..... 215,851  
Invalid chair, adjustable, F. Bohart ..... 215,871  
Knitting machines, knocking over bit for, W. D. Ormsby ..... 215,963  
Labels, pictures, etc., machine for varnishing, gumming, and sizing, J. T. Turner ..... 215,845  
Ladder hook, adjustable, D. F. Foster ..... 215,729  
Ladder, platform, A. J. Andrews ..... 215,712  
Lamp, E. Blackman ..... 215,867  
Lamp, E. M. Lowden (r) ..... 8,729  
Lamp attachment, L. W. Peck ..... 215,964  
Lamp bracket, H. B. Mills ..... 215,955  
Lamp chimney, C. L. & C. Bartholomew ..... 215,735  
Lamp chimney, globe, J. H. White ..... 216,007  
Lamp, electric, W. Gilman ..... 215,910  
Lamp shade, P. K. Guild ..... 215,816  
Lathing machine, Copeland & Woodward ..... 215,796  
Laths, grinding, C. Fest ..... 215,901  
Lawn sprinkler and hose reel, E. L. Abbott ..... 215,709  
Levees, constructing, M. C. Lawton ..... 215,943  
Lifting handle, W. H. Hart ..... 215,739  
Line holder, J. J. W. Wilson ..... 216,008  
Load binder, Holler & McDaniel ..... 215,746  
Mail bag dropper, Bruchler & Sindorf ..... 215,875  
Machining frame, apparatus for, J. A. Eberhardt ..... 215,814  
Mash tub, G. Young ..... 216,011  
Measure and funnel, G. W. Shaw ..... 215,892  
Mechanical movement, T. W. Eaton ..... 215,810  
Mechanical movement, C. Tyson ..... 215,778  
Metal bar reducer, G. J. Capewell ..... 215,719  
Metal shearing machine, C. A. & L. K. Williams ..... 215,780  
Microscope, W. H. Bullock ..... 215,878  
Milk cooler, Ford & Butler ..... 215,908  
Milk pan, C. C. Fairbank ..... 215,812  
Milk setter, F. G. Butler (r) ..... 8,734  
Moth proof fur case, C. M. Parker ..... 215,835  
Motion converter, R. P. Bowdoin ..... 215,872  
Mowing and reaping machine, G. O. S. Conway ..... 215,774  
Musical instrument, mechanical, E. P. Needham ..... 215,831  
Nut lock, G. W. Rhines ..... 215,836  
Nut lock, J. D. Van Benthuyzen ..... 215,779  
Oil, etc., can for, J. D. Pierce ..... 215,771  
Oils for illumination, heavy hydrocarbon, R. S. Merrill (r) ..... 8,729  
Ore pulverizer, I. M. Phelps ..... 215,966  
Ore pulverizer and separator, A. Goodhart ..... 215,912  
Ore roaster, revolving, D. W. Brunton ..... 215,877  
Organs, pedal attachment for reed, G. B. Kelly ..... 215,822  
Ortery, A. Mang ..... 215,948  
Oven, domestic, J. Watson ..... 216,003  
Pails, removable cover or front for, Mayo & Atkinson ..... 215,828  
Paper box cover machine, M. F. Wilson ..... 216,009  
Paper machines, automatic feed for, J. T. F. MacDonnell ..... 215,940  
Paper pulp from wood, making, W. E. Farrell ..... 215,728  
Paper vessel, W. C. Ritchie ..... 215,970  
Pen, fountain, L. W. Fairchild ..... 215,813  
Pen, fountain, G. Wells ..... 216,004  
Pianoforte action, G. O. V. Roedern ..... 215,977  
Picture, A. F. Craig ..... 215,735  
Pitman connection and crank pin, D. H. Cooper ..... 215,796  
Plaiting machine, J. H. Brown ..... 215,100  
Planter, corn, W. W. Goodwin ..... 215,913  
Planter, corn, Taylor & Rice ..... 215,891  
Plaster and pad, R. M. Kennedy ..... 215,867  
Flow, E. O. Beach ..... 215,715  
Plow, sulky, T. E. Jefferson ..... 215,829  
Plows or harrows, farm truck or draught attachment for, M. Harris ..... 215,918  
Polisher, tumbling, J. W. Hyatt ..... 215,731  
Porcelain, box and cover for firing decorated, E. M. Ford ..... 215,815  
Post driver, W. A. Newton ..... 215,832  
Printing, autographic, W. T. Howard ..... 215,926  
Printing machine sheet deliverer, S. D. Tucker ..... 215,944  
Printing surfaces, embossing metal for, A. C. & G. B. Carey ..... 215,799  
Propulsion of vessels, pneumatic, R. H. Tucker ..... 215,842  
Puddling furnace, I. Beaudan ..... 215,865  
Pulp, making wood, C. B. Carter ..... 215,830  
Pump, C. G. Grove ..... 215,737  
Pump plunger, G. H. Corlies ..... 215,801  
Pump, submerged, J. M. May ..... 215,851  
Pump valve, G. H. Corlies ..... 215,801  
Pumping engine, steam, G. H. Corlies ..... 215,802  
Pumping engine, G. H. Corlies ..... 215,803  
Punch, leather cutting, B. Bohonon ..... 215,870  
Quartz crusher, I. M. Phelps ..... 215,968  
Radiator, steam, J. T. Kelly ..... 215,825  
Rail joint, E. P. Hyatt ..... 215,819  
Railway switch, S. B. Nickum ..... 215,900  
Railway track, portable, M. Pesant ..... 215,770  
Refrigerator, J. P. Ast ..... 215,850  
Ribbon clasp or clip, C. C. G. Hubert ..... 215,747  
Rivet, tubular, B. L. D'Aubigne ..... 215,889  
Roll for forming metal articles, G. J. Capewell ..... 215,718

Roller and pulverizer, G. Meding ..... 215,954  
Roofing, metallic, L. Struble ..... 215,989  
Rotary engine, R. Campbell ..... 215,717  
Sad iron, Williams & Warren ..... 215,781  
Sad iron and fluting roller, C. J. Kramer ..... 215,941  
Saddle tree, gig, J. B. Gathright ..... 215,734  
Sauce, making solidified, J. A. Liebert ..... 215,944  
Sash fastener, F. B. Glascock ..... 215,911  
Sawing box stuff, machine for, J. Du Bois ..... 215,897  
Sawing machine, drag, J. K. Alters ..... 215,858  
Scale beam, J. H. Linen ..... 215,826  
Sewer gas stopper, C. Y. Wemple ..... 216,006  
Sewer pipe, P. McMacKinn ..... 215,947  
Sewing machine, J. A. True ..... 215,841  
Shade supporter, S. H. Miller ..... 215,763  
Shafting coupler, W. T. McMasters ..... 215,769  
Sheet metal can seam, R. Norton ..... 215,766  
Shingle bolts, mill for sawing, J. Du Bois ..... 215,898  
Ship's hull, R. H. Tucker ..... 215,994  
Shirt front or dickey, G. C. Henning ..... 215,743  
Shoe clasp, King & Hammond ..... 215,834  
Shoes, button hole for, W. F. Hill ..... 215,745  
Sickle, etc., holder, H. E. Fuller ..... 215,732  
Sink valve, Crossman & Sonnes ..... 215,897  
Skate, roller, L. B. Jackson, Jr. .... 215,732  
Skid, W. H. Dooty ..... 215,895  
Sled, R. T. Ogden ..... 215,892  
Sled propeller, R. Steel ..... 215,988  
Smoke and dust excluder, J. E. Driesbach ..... 215,886  
Snow plow, J. M. Baldwin ..... 215,860  
Spinning machine spindle, D. Kelley ..... 215,985  
Spooling guide, C. Sullivan ..... 215,990  
Spools, thread fastener on, W. E. Barrows ..... 215,796  
Stall for vessels, cattle, B. Albee ..... 215,855  
Stamp, canceling and dating, W. J. Blackwell ..... 215,889  
Stamp mill cam, J. Scott ..... 215,980  
Steam boiler, tubular, G. H. Corlies ..... 215,708  
Steam engine beam, G. H. Corlies ..... 215,808  
Steam engine, compound, G. H. Corlies ..... 215,799  
Steam engine cylinder, G. H. Corlies ..... 215,807  
Steam generator, M. J. O'Reilly ..... 215,894  
Steamer and drier, grain, L. Hartson ..... 215,919  
Stencils, producing autographic, S. S. Nickerson ..... 215,883  
Stirrup, saddle, P. A. De La Nux ..... 215,942  
Stool, D. B. Reynolds ..... 215,773  
Stove, cooking, J. B. Long ..... 215,827  
Stove, heating, J. P. Clark ..... 215,881  
Stove, heating, M. Heibling ..... 215,742  
Stoves, long center and reservoir cover for, B. R. Burton et al. .... 215,716  
Straw cutter, J. Dick, Jr. .... 215,894  
Sublimating apparatus, I. M. Phelps ..... 215,939  
Sulf boat, R. H. Tucker ..... 215,848  
Surveying instrument, I. Humphrey ..... 215,749  
Swive holder, W. L. Pitts ..... 215,972  
Tag fastener, F. Morris ..... 215,705  
Tapping pipe fittings, machine for, D. Ackerman ..... 215,713  
Teaching arithmetic, device for, S. P. Halleck ..... 215,916  
Teeth, artificial, J. W. Holt ..... 215,924  
Telephone switch, H. L. Roosevelt ..... 215,897  
Tether, Fox & Cottrell ..... 215,730  
Thill coupling, R. F. Gaines ..... 215,907  
Thill coupling, R. W. Hawes ..... 215,921  
Thrust block, J. S. Wilson ..... 215,782  
Tile moulding for holding tiles, C. A. Wellington ..... 215,849  
Time lock, T. Shaw ..... 215,777  
Toy pistol, J. M. Keep ..... 215,834  
Tumbling rod knuckle, C. Q. Hayes ..... 215,822  
Umbrella frame, J. Miniere ..... 215,880  
Valve gear, steam engine, G. H. Corlies ..... 215,797  
Valve, steam engine exhaust, G. H. Corlies ..... 215,806  
Vapor burner, Z. Davis ..... 215,880  
Vehicle dashboard, B. J. Warden ..... 216,002  
Vehicle spring, Spalding & Wiede ..... 215,996  
Velocipede, J. E. Brown ..... 215,878  
Veneer sander and smoother, W. Gardner ..... 215,908  
Vent, automatic air, J. P. Gruber ..... 215,915  
Ventilator, G. R. Buffham ..... 215,791  
Ventilator, L. J. Wing ..... 215,783  
Wagon, beer, J. G. Unseald ..... 215,947  
Wagon, buck board, B. A. Morse ..... 215,968  
Wash board, F. Freilich ..... 215,906  
Weather strip, I. Bennett ..... 215,805  
Weather strip, H. L. Hyre ..... 215,750  
Wind engine, J. W. Kelsey ..... 215,753  
Windmill, J. Desjardins ..... 215,899  
Wire drawing, lubricating material for use in, A. B. Brown ..... 215,875  
Yoke coupling for vehicles, neck, S. Brown ..... 215,874

#### TRADE MARKS.

Capsuled medicine, S. Lymoulin ..... 7,371  
Cigars, cigarettes, smoking and chewing tobacco, Goodwin & Co. .... 7,370  
Cigars, cigarettes, smoking and chewing tobacco, and snuff, H. Welsh ..... 7,367  
Cigars, cigarettes, and smoking tobacco, Stratton & Storm ..... 7,353, 7,354, 7,364  
Dyspepsia cure, J. C. D. Curtiss ..... 7,369  
Fertilizing compositions or compounds, The Chesapeake Guano Company ..... 7,355  
Flour, Rolston, Hall & Co. .... 7,367  
Flour, Thomas & Co. .... 7,375  
Kerosene oil, R. W. Forbes ..... 7,373  
Lard, W. J. Wilcox & Co. .... 7,368  
Laundry soap, Allison Brothers ..... 7,372  
Lindiment, F. P. Brailiard ..... 7,362  
Lotions for the skin and hair, A. A. Heaton ..... 7,361  
Petroleum for illuminating and lubricating purposes, Mather Brothers ..... 7,363  
Pills for cure of chills and fever, W. W. Brownfield ..... 7,365  
Preparation of corn starch, A. Erkenbrecher ..... 7,359  
Smoking tobacco, J. R. Day & Bro. .... 7,351  
Starch for laundry use, A. Erkenbrecher ..... 7,358, 7,360  
Ski suit, S. B. & M. Fleisher ..... 7,366  
Troches or lozenges, Hall & Hodgman ..... 7,374  
Wax or mining candles, W. T. Coleman & Co. .... 7,365  
Wood barrels, kegs, well buckets, and pails, J. F. Vogt & Bro. .... 7,356

#### DESIGNS.

Billiard table, H. W. Collender ..... 11,300, 11,310  
Carpet, W. McCallum ..... 11,314  
Combined rose and escutcheon, G. S. Barkentin ..... 11,313  
Dish handle, S. Stevens ..... 11,307  
Door knob, G. S. Barkentin ..... 11,315  
Gimp, J. H. Thorp ..... 11,311  
Handles of spoons and forks, W. C. Beattie ..... 11,312  
Ornamental chain, W. T. Chamberlain ..... 11,311  
Rubber mats, G. Woffenden ..... 11,308  
Stands for sad irons, etc., L. & W. H. Berger ..... 11,308

#### English Patents Issued to Americans.

From May 30 to June 8, inclusive.

Filtering machine, G. C. W. Belcher, St. Louis, Mo.  
Gas burner attachment, W. W. Bachelder, N. Y. city.  
Grain binders, F. Randall, Mich.  
Tramway cars, J. Stephenson, New York city.



## Advertisements.

Inside Page, each insertion --- 75 cents a line.  
Back Page, each insertion --- \$1.00 a line.  
(About eight words to a line.)  
Engravings may be made at the same rate  
per line, by measurement, as the letter press. Adver-  
tisements must be received at publication office as early  
as Thursday morning to appear in next issue.

THE

## Hancock Inspirator.

## ADDITIONAL TESTIMONY.

MINERVA, O., November 13th, 1878.  
Messrs. FAIRBANKS, MORSE & CO., Pittsburgh, Pa.:  
Gents: In regard to the "Hancock Inspirator," we  
would say that we have been using a No. 10 for the last  
three months, to supply our boiler, which is 16 feet long  
and 22 inches in diameter. The Inspirator lifts the water  
22 feet and forces it 5 feet into the boiler, and does not  
require more than 20 lb. steam pressure. It does not  
use as much steam as a pump, and if the water happens  
to be low at night when we get through, we just let the  
little fellow run, and by the time the steam is run down  
our boiler is full enough. Yours truly,  
T. D. YOST, Pioneer Planing Mills, Minerva, O.

Illustrated and descriptive catalogues sent on appli-  
cation to  
**Hancock Inspirator Co.,**  
52 CENTRAL WHARF,  
BOSTON, MASS.



The attention of Architects, Engineers, and Builders  
is called to the great decline in prices of wrought  
STRUCTURAL IRON.  
It is believed that, were owners fully aware of the small  
difference in cost which now exists between iron and  
wood, the former, in many cases, would be adopted,  
thereby saving insurance and avoiding all risk of inter-  
ruption to business in consequence of fire. Book of de-  
tailed information furnished on application.

**PAINTING.** The Combined Stripping Tool and  
Alphabet Scale can be used for  
stripping walls, ceilings, panels,  
etc., by any one. The Scale shows  
at a glance the exact proportions and space of the dif-  
ferent alphabets. Price, \$1. Patent Veneers for grainers  
or learners, 75 cts. a set. JAS. E. HAMMOND, Manuf.,  
New Shoreham, N. I. Good Agents desired.

A LIGHT TRANSPARENT SATIN FINISH WATER-  
proof. Producing the most magnificent surface. De-  
velops colors heretofore unequalled. DORMAN MFG  
CO., New York.

**BUSINESS OPPORTUNITY.**  
\$15,000 will buy an established and paying manufac-  
turing business. Address "Administrator," Newark, N. J.

**THE FORSTER-FIRM** GOLD AND SILVER  
AMALGAMATING COMPY  
of Norristown, Pa., will grant  
state rights or licenses on  
easy terms. This system  
works up to assay, and re-  
covers the mercury rapidly.  
Apply as above.

**TO MANUFACTURERS. — WANTED —**  
Some good firm to make and sell on royalty a valuable  
and salable patent, suitable for the hardware trade.  
Patent allowed April 30th, 1879. For particulars, address  
J. M. GLEICHMAN, Stuart, Iowa.

**STEAM FIRE ENGINES (15 made) AND**  
**JACKET HOSE** (patented for Sweden) of the best  
quality, to be had of J. W. MALMBERG,  
May, 1879. Stockholm (Sweden).

**LIGHT DRAUGHT, FAST, STERN**  
Wheel, Steam Yachts. These yachts are 34 feet long, 6  
feet 3 inches beam; draught, 16 inches; speed, 7 miles  
an hour. Designed under direction of Col. F. W. Farqu-  
har, U. S. A., by M. Meigs, U. S. Civil Engineer, U. S.  
Works, Rock Island, Ill. With working drawings, dimen-  
sions, and particulars of vessel, engine, boiler, and  
wheel, furnished by the author. The serviceable  
character of these boats, their simplicity of construction,  
roominess, and light draught render them very  
desirable, especially for shallow waters. Contained  
in SCIENTIFIC AMERICAN SUPPLEMENT No. 179.  
Price 10 cents. To be had at this office and of all news-  
dealers.

**Baker Rotary Pressure Blower.**  
(FORCED BLAST.)  
Warranted superior to any  
other.  
**WILBRAHAM BROS.**  
2318 Frankford Ave.  
PHILADELPHIA

**STEAM ENGINE**  
**AND BOILERS,**  
Wood and Iron Working Machinery.  
(Send for circulars.)  
GEO. M. CLAPP, BELCHER & BAGNALL,  
Manager. Warehouses:  
#1 Cortland Street, N. Y.

**LADIES** can make \$5 a day in their own city or town.  
Address ELLIS MFG CO., Waltham, Mass.

**WHEELER'S PATENT WOOD FILLER**  
fills the pores of wood perfectly, so that a smooth finish  
is obtained with one coat of varnish. Send for circular.  
Mention this paper. BRIDGEPORT WOOD FINISH-  
ING CO., 40 Bleecker Street, New York.

**PERFORATED METALS.**  
IRON, COPPER, BRASS, OR ZINC PLATES,  
10 in. wide, 1-16 in. thick, or less, any lengths.  
LIDGERWOOD MFG. CO., 36 Liberty St., New York.

**PATENTED ARTICLES, MACHINES,**  
etc., manufactured in France according to the Laws by  
the Société Anonyme pour l'Exploitation de Brevets,  
11 Rue de Flandre, Paris, France. References: Mackay  
Sewing Machine Association, Boston, Mass.

## THE WEEKLY SUN,

A large Eight Page Sheet of Fifty-  
six broad Columns, will be sent,  
Post Paid, to any Address, till Jan.  
1, 1880,

FOR HALF A DOLLAR.

Address THE SUN, New York City.

**TOOL DEPOT.** SMALL TOOLS, LATHES, &c.  
EVERY BRANCH OF MECHANICAL TRADES  
CATALOGUE TALIMAN & TADGEE, PHILADELPHIA

**Pond's Tools,**  
Engine Lathes, Planers, Drills, &c.  
**DAVID W. POND, Worcester, Mass.**

**EDMUND DRAPER,**  
Manufacturer of First-class Engineers' Instruments.  
Established in 1830. 226 Pear St., Phila., Pa.

## "The 1876 Injector."

Simple, Durable, and Reliable. Requires no special  
valves. Send for illustrated circular.  
**WM. SELLERS & CO., Phila.**



Small Tools of all kinds; GEAR WHEELS, parts of  
MODELS, and materials of all kinds. Catalogues free.  
GOODNOW & WIGHTMAN, 126 Wash'n St., Boston, Mass.

**Shafts, Pulleys, Hangers, Etc.**

Full assortment in store for immediate delivery.  
**WM. SELLERS & CO.,**  
79 Liberty Street, New York.

**OUTWARD MARKS OF A GOOD COW.**  
By Capt. JOHN C. MORRIS, Pa. Carefulness in Breed-  
ing. How to Select for Breeding. Marks of the Hand-  
some Cow. Care and Training of the Heifer. Infal-  
lible Marks of Good Milk. Distinguishing Marks and  
Characteristics of the "Bastard" and the "Bogus"  
Cow, etc. Contained, with useful Remarks on Bee  
Culture, in SCIENTIFIC AMERICAN SUPPLEMENT No.  
135. Price 10 cents. To be had at this office and of all  
newsdealers.

**BLAKE'S STONE AND ORE BREAKER AND CRUSHER.**  
For breaking hard and brittle substances to any size. Endorsed by the leading Mining,  
Manufacturing, and Railroad corporations in the United States and Foreign Countries.  
First Premium wherever exhibited, and hundreds of testimonials of the highest character.  
A NEW SIZE FOR PROSPECTING AND LABORATORY USE.  
See ALL STATE PATENTS and papers of the firm preceding  
actuated by a revolving shaft and fly-wheel, are infringements on our patent, and makers and  
users of such will be held accountable. Address  
**BLAKE CRUSHER CO., New Haven, Conn.**

THE  
**Scientific American, Export Edition.**  
PUBLISHED MONTHLY.

The Scientific American, Export Edition, is a  
large and splendid periodical, issued once a month,  
forming a complete and interesting monthly record of  
all Progress in Science and the Useful Arts throughout  
the World. Each number contains about one hundred  
large quarto pages, profusely illustrated, embracing:  
(1.) Most of the latest and most important scientific  
discoveries and valuable information. Every  
number has from seventy-five to one hundred new en-  
gravings, showing the most recent improvements and  
advances in Science and the Industrial Arts.  
(2.) Prices Current, Commercial, Trade, and Manu-  
facturing Announcements of Leading Houses. In con-  
nection with these Announcements many of the principal  
Articles of American Manufacture are exhibited to  
the eye of the reader by means of splendid engravings;  
the whole forming an elegantly printed standard  
Catalogue, or Permanent Directory, of the Latest and  
Best American-made Goods, always under the eye of  
the foreign buyer, constantly influencing his preferences  
and purchases.

The Scientific American, Export Edition, has a  
large guaranteed circulation in all the principal  
Cities and Commercial Centers of the World.  
It is regularly received and filed for public ex-  
amination by nearly all U. S. Consuls. Go into  
almost any American Consulate in any quarter of  
the globe, and the objects of greatest interest there to  
be found are the numbers of THE SCIENTIFIC AMERICAN.  
Foreign Merchants, Buyers of Goods, and  
others are always referred by the Consular Officials  
to the pages of this Journal, as containing the most re-  
cent announcements of the best reliable American  
Goods and Manufactures. THE SCIENTIFIC AMERICAN  
is also on file in the Principal Cafés, Club Rooms, and  
Exchanges. Among the regular subscribers for THE  
SCIENTIFIC AMERICAN, Export Edition, are leading  
Commercial Houses in foreign cities, Engineers, Direc-  
tors of Works, Government Officials, and other promi-  
nent influential persons. Regular files of this  
paper are also carried on all the principal lines of  
STEAMSHIPS, foreign and coastwise, leaving the port  
of New York.

No export publication sent from the United States  
reaches so many readers as THE SCIENTIFIC AMERICAN,  
Export Edition. It is by far the most splendid, satisfac-  
tory, and superior Export Journal ever brought before  
the public. Its pages are so arranged as to permit the pub-  
lication, at very low prices, of large and handsomely  
displayed advertisements of American Goods  
and Manufactures, with Engravings, which  
are always attractive to foreign purchasers.  
THE SCIENTIFIC AMERICAN, Export Edition, already  
enjoys the advertising patronage of many of the  
Great Manufacturing Establishments of this Country,  
who find it to be an UNRIVALED MEDIUM FOR SEC-  
URING NEW ORDERS AND EXTENDING TRADE.  
If you wish to increase your business, try a  
handsome advertisement for one year, continuously, in  
THE SCIENTIFIC AMERICAN, Export Edition. Rates,  
\$500 a year for a full page; half page, \$300; quarter  
page, \$175; one-eighth page, \$100. Half-yearly rates in  
slightly increased proportion.  
Published about the 30th of each month.  
Single numbers of THE SCIENTIFIC AMERICAN, Export  
Edition, 10 cents. To be had at this office and at all the  
news stores. Subscriptions for Five Dollars a year; sent,  
postpaid, to all parts of the world.

**MUNN & CO., PUBLISHERS.**  
37 PARK ROW, NEW YORK.

**THE BEST STEAM PUMP in AMERICA**  
More than 4500 in use.  
Send for reduced Price List.  
**Deane Steam Pump Works**  
92 & 94 LIBERTY ST.,  
NEW YORK.

## STEAM PUMPS.

HENRY R. WORTHINGTON,

239 Broadway, N. Y. 83 Water St., Boston.  
THE WORTHINGTON DUPLEX PUMPING ENGINES FOR  
WATER WORKS—Compound, Condensing or Non-Con-  
densing. Used in over 100 Water-Works Stations.  
STEAM PUMPS—Duplex and Single Cylinder.

Price list issued Jan. 1, 1879,  
with a reduction exceed-  
ing 30 per cent.

WATER METERS. OIL METERS.

**NATIONAL BOLT & PIPE MACHINERY CO.**  
BOLTS OF HAND & POWER, BOLT & PIPE CUTTING, &c.  
MOUNTED BY HAND, HOT & COLD, PRESSING, &c.  
FOR TAPS & CHISELS. SEND FOR CATALOGUE.

**THE FOSSIL FORESTS OF THE YEL-  
LOWSTONE NATIONAL PARK.** By W. H. Holmes. A  
very interesting and valuable paper descriptive of the  
remarkable "Volcanic Tertiary" formations of the  
above region, 5,500 feet in thickness. Illustrated by an  
engraving of the north face of Amethyst mountain,  
2,600 ft. high, the river bed 6,700 ft. high, showing the  
position of the multitudes of ancient forest tree trunks  
of gigantic size, turned into stone and now standing on  
the cliffs, together with many other interesting geologi-  
cal particulars. Contained in SCIENTIFIC AMERICAN  
SUPPLEMENT, No. 180. Price 10 cents. To be had at this  
office and of all newsdealers.

**STEAM PUMPS** Wright's Pat. Bucket  
Pumpers are the best.  
**VALLEY MACHINE CO.**  
Easthampton, Mass.

**SCIENTIFIC AMERICAN SUPPLEMENT.**  
Any desired back number of the SCIENTIFIC AMERICAN  
SUPPLEMENT can be had at this office for 10 cents. May  
also be had or ordered through booksellers and news-  
dealers everywhere. MUNN & CO., Publishers.  
37 Park Row, New York.

**WOODWORTH SURFACE PLANERS.** Planers  
and Matchers, 300, B. C. HILLS, 19 Chambers  
Street, New York.

**THE BEST!**  
**THE HAGERSTOWN DRILL.**  
The most reliable and success-  
ful GRAIN DRILLS in use—can  
change quantities of seed while  
in motion—the STANDARD FERTIL-  
IZING DRILL of the Middle  
States, strong, durable, and  
simple, with our GUIN SPRING  
HOSE AND GRASS SEED AT-  
TACHMENT. Manufacturers of the CELEBRATED VICTOR  
DOUBLE HULLER CLOVER MACHINE, the Best in  
the World. Manufactured by HAGERSTOWN AGRICUL-  
TURAL IMPLEMENT CO., Hagerstown, Md.

**PROSPECTUS**  
OF THE  
**Scientific American**  
FOR 1879.

The Most Popular Scientific Paper in the World.

## VOLUME XL.—NEW SERIES.

The publishers of the SCIENTIFIC AMERICAN beg  
to announce that on the Fourth day of January, 1879,  
a new volume will be commenced. It will continue to be  
the aim of the publishers to render the contents of the  
new volume as, or more, attractive and useful than any  
of its predecessors.

Only \$3.20 a Year including Postage. Weekly.  
32 Numbers a Year.

This widely circulated and splendidly illustrated  
paper is published weekly. Every number contains six-  
teen pages of useful information, and a large number of  
original engravings of new inventions and discoveries,  
representing Engineering Works, Steam Machinery,  
New Inventions, Novelties in Mechanics, Manufactures,  
Chemistry, Electricity, Telegraphy, Photography, Archi-  
tecture, Agriculture, Horticulture, Natural History, etc.

All Classes of Readers find in THE SCIENTIFIC  
AMERICAN a popular resume of the best scientific in-  
formation of the day; and it is the aim of the publishers  
to present it in an attractive form, avoiding as much as  
possible abstruse terms. To every intelligent mind,  
this journal affords a constant supply of instructive  
reading. It is promotive of knowledge and progress in  
every community where it circulates.

**Terms of Subscription.**—One copy of THE SCIENTIFIC  
AMERICAN will be sent for one year—32 numbers—  
postage prepaid, to any subscriber in the United States  
or Canada, on receipt of three dollars and twenty  
cents by the publishers; six months, \$1.50; three  
months, \$1.00.

**Clubs.**—One extra copy of THE SCIENTIFIC AMERICAN  
will be supplied gratis for every club of five subscribers  
at \$3.50 each; additional copies at same proportionate  
rate. Postage prepaid.

One copy of THE SCIENTIFIC AMERICAN and one copy  
of THE SCIENTIFIC AMERICAN SUPPLEMENT will be sent  
for one year, postage prepaid, to any subscriber in the  
United States or Canada, on receipt of seven dollars by  
the publishers.

The safest way to remit is by Postal Order, Draft, or  
Express. Money carefully placed inside of envelopes,  
securely sealed, and correctly addressed, seldom goes  
astray, but is at the sender's risk. Address all letters  
and make all orders, drafts, etc., payable to

**MUNN & CO.,**  
37 Park Row, New York.

To Foreign Subscribers.—Under the facilities of  
the Postal Union, the SCIENTIFIC AMERICAN is now sent  
by post direct from New York, with regularity, to subscrib-  
ers in Great Britain, India, Australia, and all other  
British colonies; to France, Austria, Belgium, Germany,  
Russia, and all other European States; Japan, Brazil,  
Mexico, and all States of Central and South America.  
Terms, when sent to foreign countries, Canada excepted,  
\$4, gold, for SCIENTIFIC AMERICAN, 1 year; \$6, gold, for  
both SCIENTIFIC AMERICAN and SUPPLEMENT for 1  
year. This includes postage, which we pay. Remit by  
postal order or draft to order of Munn & Co., 37 Park  
Row, New York.

## No Sawdust! No Planing!

Thin lumber, 1-16 to 1/4 inch thick, cut and seasoned by  
our recently patented machines, equal if not superior to  
the sawed and planed wood, being smooth, flat, and in  
all cases perfectly seasoned. Used by the largest manu-  
facturers in the country, and giving entire satisfaction.  
In addition to our specialty, our usual complete stock  
of sawed Hardwood, Lumber, and Veneers, figured and  
plain, Buris, etc.

GEO. W. READ &amp; CO.,

186 to 200 Lewis Street, New York.



**RUFFNER & DUNN, Patentees**  
and Sole Manufacturers of the Excelsior Steel Tube  
Cleaners. Price \$1.00 per inch. Send for circular.  
SCHUYLKILL FALLS, PHILA., PA.

**THE DINGEE & CONARD CO'S**  
BEAUTIFUL EVER-BLOOMING

**ROSES**  
THE BEST IN THE WORLD.  
Our Great Specialty is growing and distributing  
these Beautiful Roses. We deliver Strong Pot  
Plants, suitable for immediate bloom, safely by mail  
at all post-offices. 5 Splendid Varieties, your  
choice, all labeled, for \$1; 12 for \$3; 19 for \$5;  
26 for \$8; 35 for \$10; 75 for \$15; 100 for \$18.  
Send for our New Guide to Rose Culture—  
60 pages, elegantly illustrated—and choose from over  
Five Hundred Finest Sorts. Address  
**THE DINGEE & CONARD CO.,**  
Rose Growers, West Grove, Chester Co., Pa.

\$77 a Month and expenses guaranteed to Agents.  
Outfit free. SHAW & CO., AUGUSTA, MAINE.  
**BIG PAY** to sell our Rubber Printing Stamps. Sam-  
ples free. Taylor Bros. & Co., Cleveland, O.

**ELEVATORS**  
HAND POWER AND HYDRAULIC  
FREIGHT & PASSENGER  
SHAFING PULLEYS & HANGERS  
L. S. GRAVES & SON, ROCHESTER, N.Y.

**FOR SECOND-HAND ENGINES,**  
Address HARRIS IRON WORKS, Titusville, Pa.

**LOCOMOTIVE ENGINEERING.—THE**  
most recent and best examples of Locomotive Construc-  
tion, with scale drawings, tables of principal dimen-  
sions, general description, etc., are given in the SCIENTIFIC  
AMERICAN SUPPLEMENT. The following  
may be had at this Office, or ordered through any News-  
dealer. Sent by mail prepaid. Please order by the  
numbers here given.

**Express Locomotives** of the London, Chatham and  
Dover R. R. Tank Locomotives. With Specifications,  
Dimensions, Particulars and three Engravings. Supplement  
No. 23. 10 cents.

**Locomotives at the Centennial.** A series of Eighteen  
Outline Illustrations, showing the Principal Locomotives  
exhibited at the Centennial, with their measures, and a  
table of principal dimensions of each locomotive. Sup-  
plement No. 35. 10 cents.

**Baldwin Locomotive.**—Large engraving in sectional ele-  
vation, with measures, scale, and table of dimensions.  
Supplement No. 38. 10 cents.

**Narrow Gauge Swedish Locomotive,** with one page of  
engravings. Supplement 41. 10 cents.

**Locomotives of the Brighton, South London & Croydon, Eng.**  
Two engravings. Supplement 44. 10 cents.

**Locomotive Passenger Engines of Midland Railway,** with  
table of dimensions. Three engravings. Supplement  
No. 27. 10 cents. The same number contains report  
of valuable information given before the Master  
Mechanics' Association, concerning Locomotives and  
Locomotive improvements.

**Narrow Gauge Locomotives, Indian State Railways,** en-  
graving and dimensions. Supplement No. 53. 10 cents.

**New Railway Locomotive Crane,** by Black Hawthorne &  
Co. Four engravings to scale, dimensions etc. Supple-  
ment No. 54. 10 cents.

**New Road Locomotive,** by Marshall Sons & Co. General  
description and one engraving. Supplement No. 56.  
10 cents.

**Express Passenger Locomotives, Great Western Railway.**  
With five engravings, and tables of all the principal di-  
mensions. Supplement No. 58. 10 cents.

**Locomotive for Burning Petroleum.**—Used on Russian  
Railways. With description and five illustrations. Sup-  
plement No. 63. 10 cents.

**Steam Trolley or Chair.**—Used on Oude Railway. Two  
engravings. Supplement No. 65. 10 cents.

**SHEPARD'S CELEBRATED**  
\$50 Screw Cutting Foot Lathe.

Foot and Power Lathes, Drill Presses,  
Scrolls, Circular and Band Saws, Saw  
Attachments, Chucks, Mandrels, Twist  
Drills, Dies, Calipers, etc. Send for  
catalogue of outfits for amateurs or  
artisans.

**H. I. SHEPARD & CO.,**  
231, 233, 235, & 237 West Front Street,  
Cincinnati, Ohio.



**THE TANITE CO.,**  
STROUDSBURG, PA.  
**EMERY WHEELS AND GRINDERS.**  
LONDON—9 St. Andrews St., Holborn Viaduct, E. C.  
LIVERPOOL—42 The Temple, Dale St.

**37 Park Row, New York.**  
**RANCH OFFICE—Corner of F and 7th Streets,**  
**Washington, D. C.**

---

THE "Scientific American" is printed with CHAS.  
E. JOHNSON & CO.'S INK. Tenth and Lomb